



LED LAMPS

ProLED® **Commercial Downlight** **Retrofit Luminaire**



50,000



Energy Saver



5-yr Warranty



High CRI



ENERGY STAR®

LED Commercial Retrofit Downlights combine the ease of installation with energy efficient LED technology



**Quick and Easy Installs with
Integral Junction Box**

**Replaces up to 200W
Incandescent for Over 80%
Energy Savings**

**4", 6" and 8" Options Mount
to Downlight Frames, Drywall
or Ceiling Tiles**

Backed by a 5-Year Warranty

ENERGY STAR® Certified

Applications:

Office
Lobby
Hospitality
Retail
Conference Room

Markets:

Commercial
Industrial

ProLED[®]

Commercial Downlight Retrofit Luminaire


Product #: _____ Type: _____

Project: _____ Date: _____


Comments: _____ Initials: _____

Specifications

- Downlight comes affixed with a standard junction box
- J-Box can be wired directly to the power source or fed to downlight J-box with supplied 24" flexible conduit
- Comes with 24" metal conduit
- Strong spring clips secure housing to downlight housings, drywall and ceiling tiles
- 50,000 hour life results in lower maintenance costs over time
- ETL approved for damp locations
- Dimmable to 10% (120V only)
- Acceptable for use in IC or Non-IC housings

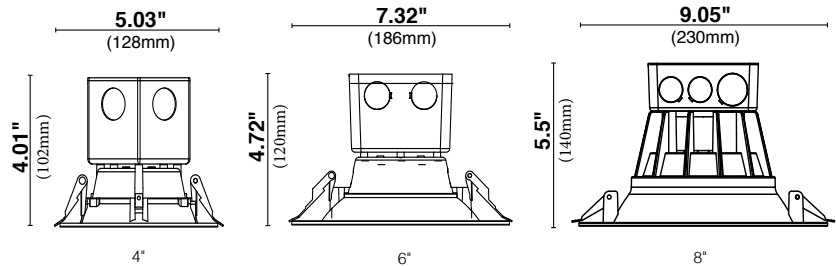

Standard junction box is integrated to downlight for quick and easy retrofit installations

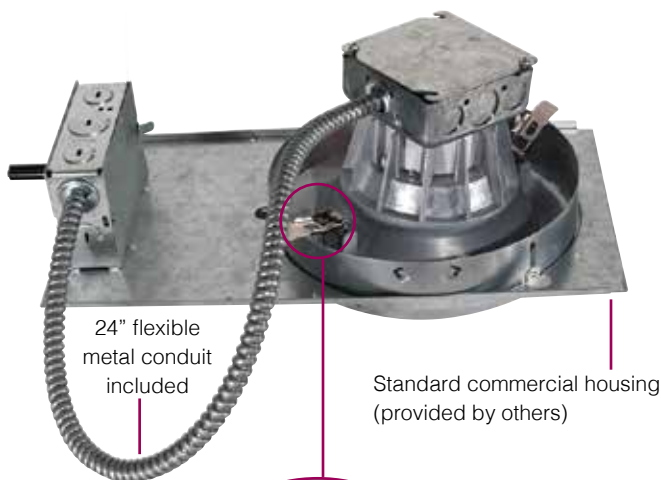

24" flexible metal conduit included

Standard commercial housing (provided by others)



Reinforced spring clips allow for easy install and a secure fit to commercial recessed housings or directly to sheetrock and ceiling tiles



Ordering Information



Watt	Product #	Product Code	Volts	Color Temp.	Lumens	Useful Life*	CRI	Dimmable	PKG. Qty.	Housing Size	Equivalent Wattage
10W	99610	CDL4FR10/927/RTJB/LED	120-277V	2700K	700	50,000	90	Yes	1/12	4"	65W
10W	99611	CDL4FR10/930/RTJB/LED	120-277V	3000K	700	50,000	90	Yes	1/12	4"	65W
10W	99612	CDL4FR10/940/RTJB/LED	120-277V	4000K	700	50,000	90	Yes	1/12	4"	65W
10W	99613	CDL4FR10/950/RTJB/LED	120-277V	5000K	700	50,000	90	Yes	1/12	4"	65W
15W	99614	CDL6FR15/927/RTJB/LED	120-277V	2700K	1000	50,000	90	Yes	1/12	6"	120W
15W	99615	CDL6FR15/930/RTJB/LED	120-277V	3000K	1000	50,000	90	Yes	1/12	6"	120W
15W	99616	CDL6FR15/940/RTJB/LED	120-277V	4000K	1000	50,000	90	Yes	1/12	6"	120W
15W	99617	CDL6FR15/950/RTJB/LED	120-277V	5000K	1000	50,000	90	Yes	1/12	6"	120W
30W	99618	CDL8FR30/927/RTJB/LED	120-277V	2700K	2000	50,000	90	Yes	1/6	8"	200W
30W	99619	CDL8FR30/930/RTJB/LED	120-277V	3000K	2000	50,000	90	Yes	1/6	8"	200W
30W	99620	CDL8FR30/940/RTJB/LED	120-277V	4000K	2000	50,000	90	Yes	1/6	8"	200W
30W	99621	CDL8FR30/950/RTJB/LED	120-277V	5000K	2000	50,000	90	Yes	1/6	8"	200W

NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

ENERGY STAR[®] certified.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

Warning: Dimmable for 120V only.

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Carlstadt | Cleveland | Houston | Los Angeles | Phoenix

© 2016 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 03-22-17. Re-order #9085.