

Catalog Number: _____ Type: _____

Project: _____

Comments: _____ Date: _____

LED Mini Wallpack



The Halco Mini-Wallpack is an ideal surface mount solution for providing efficient lighting in apartment complexes, parks, shopping malls, courtyards, and various outdoor commercial and industrial applications. Featuring a dusk-to-dawn photocell, the fixture saves up to 76% of energy consumed by HID equivalents while maintaining a slim footprint. The Mini-Wallpack is designed to withstand the elements over the course of its useful lifetime and is backed by Halco's five-year limited warranty.



Construction

- Injection Die-Cast Aluminum Housing
- Shatter Resistant Polycarbonate Lens
- Textured Architectural Bronze Powdercoat Finish
- Silicone Gasketing


Features

- Replaces up to a 100W Pulse Start Metal Halide
- Lens designed to provide high efficiency and target the light where it's needed
- Button Photocell Standard
- IP65 Rated for Outdoor Dust and Wet Locations
- Type IV VS Optics Standard

Applications

Building Perimeters
General Façade Lighting
Security Areas
Egress Illumination
Parking Structures
Commercial Buildings
Factory & Warehouses

Dimensions

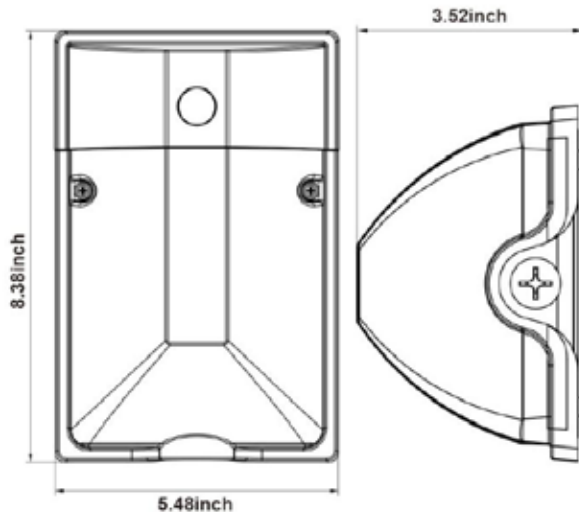

Ordering Code	Product Number	Wattage	CCT	Finish
10171	MWP12/U40BZ/PC	12	4000K	Bronze Standard Finish
10146	MWP12/U50BZ/PC	12	5000K	Bronze Standard Finish
10172	MWP24/U40BZ/PC	24	4000K	Bronze Standard Finish
10147	MWP24/U50BZ/PC	24	5000K	Bronze Standard Finish


LED Mini Wallpack

Ordering Information


Rated Wattage	12	24
Rated Lumen Output	1579	2844
Efficacy	132	119
Energy Savings	50W MH replacement equating to an approximate 75% energy savings	100W MH replacement equating to an approximate 75% energy savings
*L70 Useful Lifetime	>100,000 hrs	
L70 Seller	Maintenance and relamping costs reduced dramatically due to high L70 life time rating	
Voltage Range	120-277V Standard; **347-480V Available	
Mounting Options	J-box/surface mounted	
CCT	4000K, 5000K	
CRI	>70	
BUG Ratings	B1-U3-G3	B1-U3-G3
Warranty	5 yr. standard Halco Warranty	
Finish	Bronze Standard Finish	
Operating Temperature	-40°F ~122°F (-40°C ~ 50°C)	
Surge Protection	4kV Integral Surge Suppression Standard	
Power Factor	<.9	
THD	<15%	
Wet	***IP65 and UL Wet Listing	
Qualifications	DLC Premium, UL, cULus, RoHs	
Spacing Criteria	Available Upon Request	
Product Weight (lbs)	6.6	12.2
Dimensions (in.)	8.3" x 5.5" x 3.5"	
Construction	Injection die-cast aluminum body with shatter resistant polycarb lens	
Intended Use	"Traditional wall pack design with high-output LEDs to provide an energyefficient, low maintenance LED wall pack suitable for replacing up to 70W HPS or 100W MHfixtures. The traditional shape helps maintain building aesthetics when replacing only a portion of your building's wall packs. for outdoor applications such as personnel doors, loading areas, driveways and parking areas."	

*Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to operate past this point at decreased light levels. **347-480V Drivers are Field-Installable. Please See Accessory Table for 347-480V Diver Ordering Information. ***IP rated as "dust tight" and protected against water projected from a nozzle. Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase. ** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

Photometrics

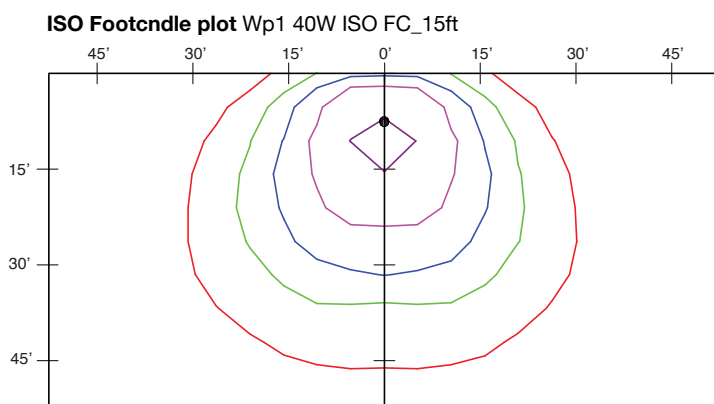

12 Watt Mini-Wallpack			
1579 Lumens			
10' Mounting Height			
FOOT-CANDLE CORRECTION FACTOR			
NEW HEIGHT:	10'	15'	20'
MULTIPLY BY:	1	0.45	0.25

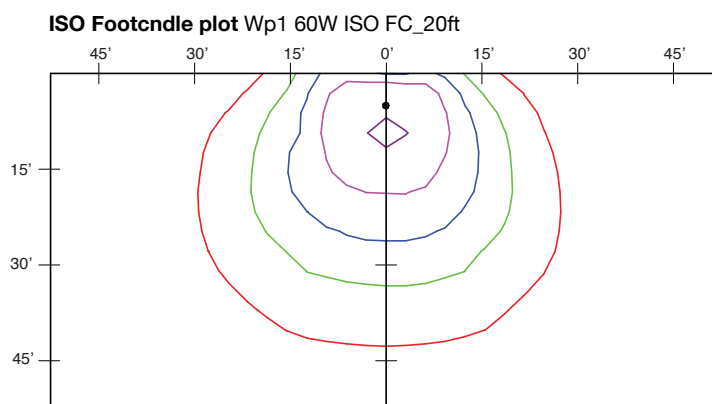

24 Watt Mini-Wallpack			
2844 Lumens			
15' Mounting Height			
FOOT-CANDLE CORRECTION FACTOR			
NEW HEIGHT:	10'	15'	20'
MULTIPLY BY:	1.95	1	0.5