

# LED BA11

## 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

Philips LED BA11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.

### Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	500 lumen
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Consistency	<4
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5.5 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	60 W

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.75
Voltage (Nom)	120 V

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	140 °F

Controls and Dimming	
Dimmable	Only with specific dimmers

Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	F15 (F15)

Approval and Application	
Energy Certifications	Energy Star


Product Data	
Order product name	5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20
Order code	572669
Numerator - Quantity Per Pack	1

# LED BA11

Numerator - Packs per outer box	6
Material Nr. (12NC)	929002091593
Full product name	5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20
EAN/UPC - Case	5004667752667



EAN/UPC - Product/Case	04667752662
------------------------	-------------

## Dimensional drawing

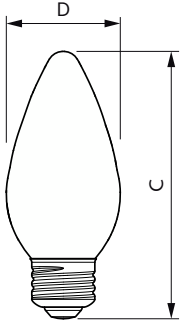

Product	D	C
5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20	1-7/8 inch	4-7/16 inch


## Photometric data

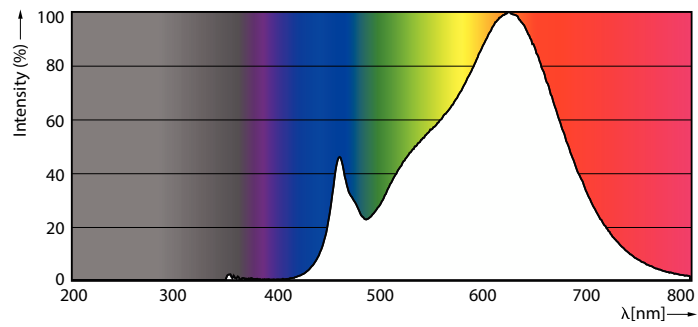

© 2023 Philips Lighting B.V. Page 11

Spectral Power Distribution Colour - 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20


General uniform lighting - 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

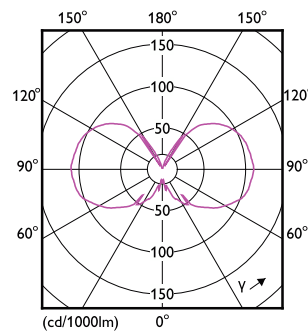

Light Distribution Diagram - 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

# LED BA11

## Lifetime

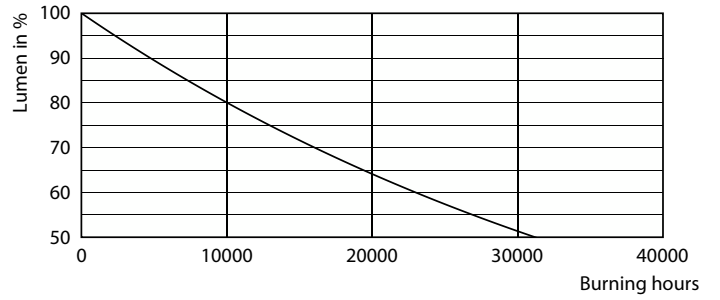

Life Expectancy Diagram - 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

Lumen Maintenance Diagram - 5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

