



Contractor-grade Plastic (Dimmable) A-Shape Lamps

14A19/CNG/830/FR/P/E26/D 4/4CT

Plastic A19 offering dimmability and a lifetime over 15,000 hours. Ideal for contractor-grade residential and multi-family spaces.

Product data


General Information			
Cap-Base	E26 [Single Contact Medium Screw]	Power Consumption	14 W
Nominal lifetime	15,000 hour(s)	Lamp Current (Nom)	120 mA
Switching Cycle	50,000	Wattage Equivalent	100 W
Lighting Technology	LED	Starting Time (Nom)	0.5 s
EU RoHS compliant	Yes	Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.7
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	Ambient temperature range	-20 °C to 45 °C
Luminous Flux	1,600 lumen	T-Case Maximum (Nom)	194 °F
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3000 K	Controls and Dimming	
Luminous Efficacy (rated) (Nom)	114 lm/W	Dimmable	Only with specific dimmers
Color Consistency	<6		
Color rendering index (CRI)	80	Mechanical and Housing	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Finish	Frosted
Operating and Electrical		Bulb Material	Plastic
Line Frequency	60 Hz	Bulb Shape	A19 [A 19mm]
Input Frequency	60 Hz		

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Product Data	
Order product name	14A19/CNG/830/FR/P/E26/D 4/4CT
Order code	581827
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929003585104



Full product name	14A19/CNG/830/FR/P/E26/D 4/4CT
EAN/UPC - Case	50046677581829
EAN/UPC - Product/Case	046677581824

Dimensional drawing




Product	D	C
14A19/CNG/830/FR/P/E26/D 4/4CT	2-3/8 inch	4-5/8 inch

Photometric data

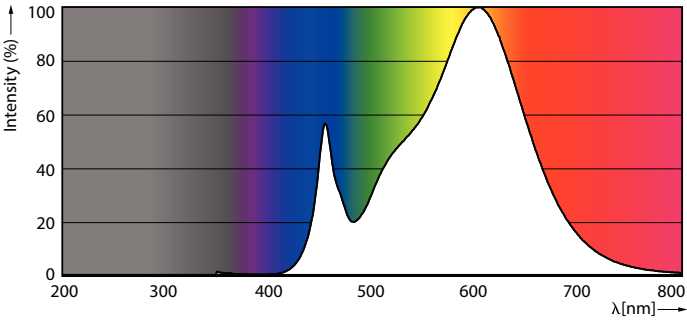

Light Distribution Diagram


Spectral Power Distribution Colour




General uniform lighting - 14A19/CNG/830/FR/P/E26/D 4/4CT

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Lifetime

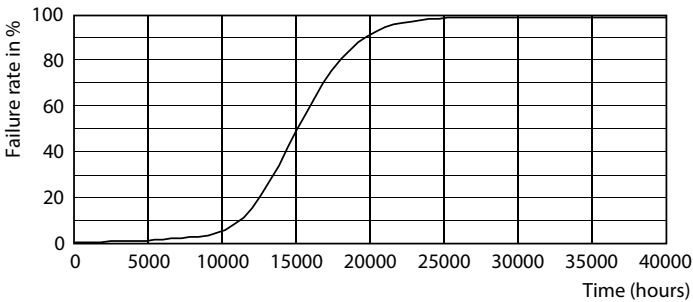

Life Expectancy Diagram - 14A19/CNG/830/FR/P/E26/D 4/4CT

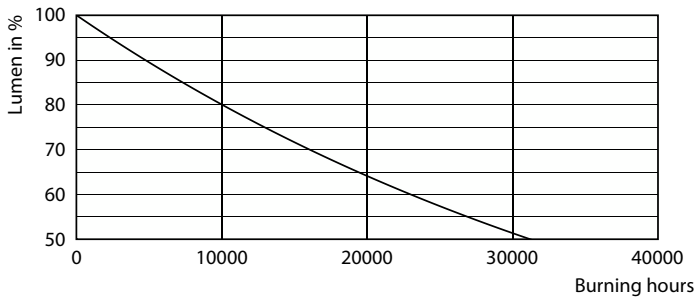

Lumen Maintenance Diagram - 14A19/CNG/830/FR/P/E26/D 4/4CT

