



LED LAMPS

ProLED® **Omnidirectional A-Shape Series**



Dimmable



Omnidirectional



Enclosed Rated



ENERGY STAR®

ProLED® Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination.



Omnidirectional Optical Design Provides 220-230° Light Distribution

UL Listed for Damp Location & Enclosed Fixtures

ENERGY STAR® Certified

Backed by a 3-Year Warranty

Applications:

Home
Education
Healthcare
Hospitality
Retail

Markets:

Residential
Commercial

Halco
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

ProLED®


Omnidirectional A-Shape Series

Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Specifications


- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 220° degree beam angle creates uniform distribution of light
- 3-year warranty

- Rated for ICAT fixtures

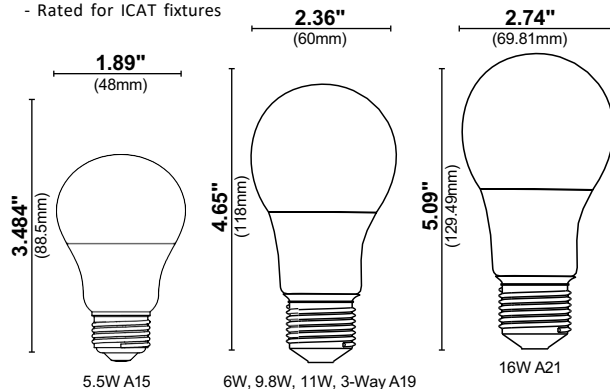

Savings Comparison

Total Lifetime Costs

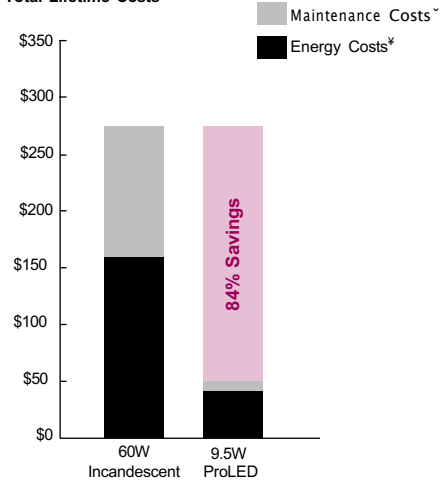

* Maintenance costs based on 15 minutes at \$40 per/hr
 † Energy costs based on \$0.11 kWh



Ordering Information

Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage	Certification
A15													
5.5W	E26	88008	A15FR5-827-DIM-LED4	120	2700K	80	450	25,000	220°	1/48	3.26"	40W	UL, ES
5.5W	E26	88009	A15FR5-830-DIM-LED4	120	3000K	80	450	25,000	230°	1/48	3.48"	40W	UL, ES
5.5W	E26	88010	A15FR5-840-DIM-LED4	120	4000K	80	450	25,000	220°	1/48	3.26"	40W	UL, ES
5.5W	E26	88011	A15FR5-850-DIM-LED4	120	5000K	80	450	25,000	220°	1/48	3.26"	40W	UL, ES
A19													
5.5W	E26	88012	A19FR6-827-DIM-LED4	120	2700K	80	450	15,000	220°	1/48	4.33"	40W	UL, ES
5.5W	E26	88013	A19FR6-830-DIM-LED4	120	3000K	80	450	15,000	220°	1/48	4.33"	40W	UL, ES
5.5W	E26	88014	A19FR6-840-DIM-LED4	120	4000K	80	450	15,000	220°	1/48	4.33"	40W	UL, ES
5.5W	E26	88015	A19FR6-850-DIM-LED4	120	5000K	80	450	15,000	220°	1/48	4.33"	40W	UL, ES
9W	E26	88016	A19FR9-827-DIM-LED4	120	2700K	80	800	15,000	220°	1/48	4.33"	60W	UL, ES
9W	E26	88017	A15FR9-830-DIM-LED4	120	3000K	80	800	15,000	220°	1/48	4.33"	60W	UL, ES
9W	E26	88018	A19FR9-840-DIM-LED4	120	4000K	80	800	15,000	220°	1/48	4.33"	60W	UL, ES
9W	E26	88019	A19FR9-850-DIM-LED4	120	5000K	80	800	15,000	220°	1/48	4.33"	60W	UL, ES
11W	E26	84971	A19FR11-827/OMNI3/LED	120	2700K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
11W	E26	84972	A19FR11-830/OMNI3/LED	120	3000K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
11W	E26	88020	A19FR11-827-DIM-LED4	120	2700K	80	1100	15,000	220°	1/48	4.56"	75W	UL, ES
11W	E26	88021	A19FR11-830-DIM-LED4	120	3000K	80	1100	15,000	220°	1/48	4.56"	75W	UL, ES
11W	E26	88022	A19FR11-840-DIM-LED4	120	4000K	80	1100	15,000	220°	1/48	4.56"	75W	UL, ES
11W	E26	88023	A19FR11-850-DIM-LED4	120	5000K	80	1100	15,000	220°	1/48	4.56"	75W	UL, ES
A21													
17W	E26	88048	A21FR17-827-DIM-LED4	120	2700K	80	2000	15,000	220°	1/30	4.92"	125W	UL, ES
17W	E26	88049	A21FR17-830-DIM-LED4	120	3000K	80	2000	15,000	220°	1/30	4.92"	125W	UL, ES
17W	E26	88050	A21FR17-840-DIM-LED4	120	4000K	80	2000	15,000	220°	1/30	4.92"	100W	UL, ES
17W	E26	88051	A21FR17-850-DIM-LED4	120	5000K	80	2000	15,000	220°	1/30	4.92"	100W	UL, ES

NEW ITEM!

* Not rated for enclosed fixtures.

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.