

LEDVANCE Luminaires

SLIM WALL PACK



Product Features

The Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID or Incandescent luminaires, offering up to 80% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in three wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

The slim design of these luminaires is aesthetically pleasing and they are available with optional photo control. LEDVANCE luminaires assure optimum light engine performance for extended service and rated life ($\geq 125,000$ hours L_{70}).


Wattage Comparison Chart

Slim Wall Pack

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
150W Inc	150	30	80%
50W HPS	62	30	52%
70W HPS	91	30	67%
70W HPS	91	30	67%
70W HPS	91	40	56%
100W HPS	120	40	67%
100W MH	130	40	69%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%

Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

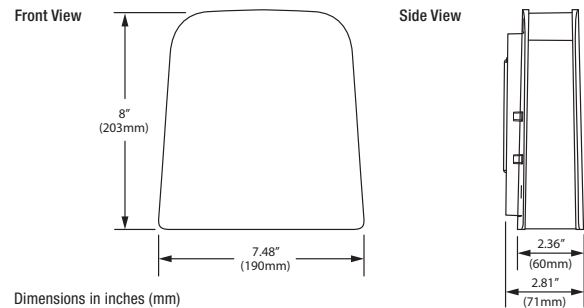

Specifications

Weight: 5.9 lbs (2.7 kg)

Construction: Two-piece cast aluminum alloy housing with powder coat paint finish and a glass lens. The standard color is bronze.

LED System: LED system with a life rating of $\geq 125,000$ hours at L_{70} @25°C. Luminaire efficacy up to 99 LPW.

Electrical: Offered in 30, 40, and 60 Watts, the luminaire is designed to operate through the 120-277 VAC universal voltage range. The LED driver is a constant current device and meets UL1310 and UL48 Class 2 with built-in over temperature protection. The fixture power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Color Characteristics: CRI > 70 ; CCT of 4000K or 5000K.

Optics: Cutoff distribution with a flat tempered glass lens.

Installation: Luminaire mounts to exterior wall.

Operating Temperature: -40°F to +104°F (-40°C to +40°C).

Listings: cULus listed to UL1598 standards for wet locations.

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specifications subject to change without notice. IES files available online.



Ordering Guide

Item Number:


SLMWPK	1A	/	XXX	XXX	7	XX	/	CO	/	BZ	/	X
Product Name	Generation		Wattage	Voltage	CRI	Color Temp (CCT)		Optics		Color/Finish		Options
SLMWPK	1A		030 = 30 Watts 040 = 40 Watts 060 = 60 Watts	UNV = 120-277V 120 = 120V	7 = > 70	40 = 4000K 50 = 5000K		CO = Cutoff Distribution		BZ = Bronze		Blank = No Option P = Photocontrol (120V only)



Photometric Data


SLMWPK1A/030UNV750/CO

Isofootcandle Lines at 15' Mounting Height

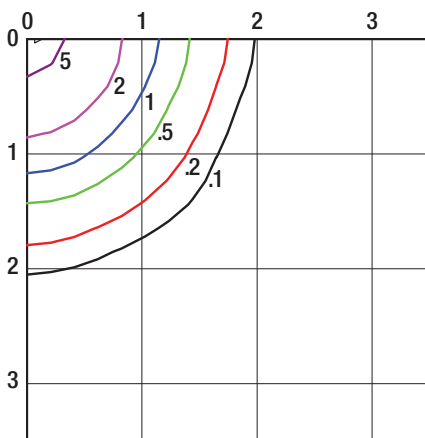


SLMWPK1A/040UNV750/CO

Isofootcandle Lines at 18' Mounting Height

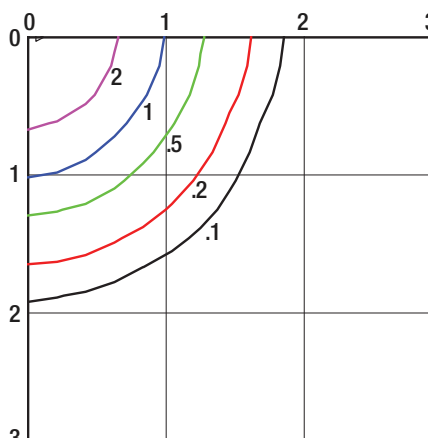

SLMWPK1A/060UNV750/CO

Isofootcandle Lines at 20' Mounting Height

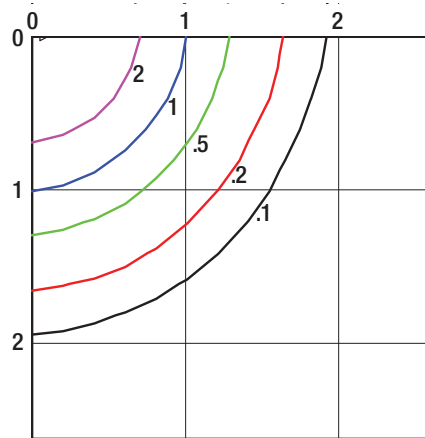

For other mounting heights apply the following multipliers:

Mounting Height	12'	15'	18'	20'	22'
Multiplier	1.56	1.00	0.69	0.56	0.46

Mounting Height	15'	18'	20'	22'	25'
Multiplier	1.44	1.00	0.81	0.67	0.52

Mounting Height	15'	18'	20'	22'	25'
Multiplier	1.78	1.23	1.00	0.83	0.64

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	CRI	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*	BUG Rating	Options
74192	SLMWPK1A/030UNV740/CO/BZ	30	120-277V	>70	4000K	Cutoff	2800	92	B1-U0-G1	
74193	SLMWPK1A/040UNV740/CO/BZ	40	120-277V	>70	4000K	Cutoff	4100	99	B2-U0-G1	
74194	SLMWPK1A/060UNV740/CO/BZ	60	120-277V	>70	4000K	Cutoff	5500	94	B2-U0-G1	
74195	SLMWPK1A/030UNV750/CO/BZ	30	120-277V	>70	5000K	Cutoff	2800	84	B1-U0-G1	
74196	SLMWPK1A/040UNV750/CO/BZ	40	120-277V	>70	5000K	Cutoff	3900	98	B2-U0-G1	
74197	SLMWPK1A/060UNV750/CO/BZ	60	120-277V	>70	5000K	Cutoff	5100	83	B2-U0-G1	
74204	SLMWPK1A/030120740/CO/BZ/P	30	120V	>70	4000K	Cutoff	2800	92	B1-U0-G1	Photocontrol
74205	SLMWPK1A/040120740/CO/BZ/P	40	120V	>70	4000K	Cutoff	4100	99	B2-U0-G1	Photocontrol
74206	SLMWPK1A/060120740/CO/BZ/P	60	120V	>70	4000K	Cutoff	5500	94	B2-U0-G1	Photocontrol
74207	SLMWPK1A/030120750/CO/BZ/P	30	120V	>70	5000K	Cutoff	2800	84	B1-U0-G1	Photocontrol
74208	SLMWPK1A/040120750/CO/BZ/P	40	120V	>70	5000K	Cutoff	3900	98	B2-U0-G1	Photocontrol
74209	SLMWPK1A/060120750/CO/BZ/P	60	120V	>70	5000K	Cutoff	5100	83	B2-U0-G1	Photocontrol

*LPW per LM79 report.

To learn more about utility rebates please visit <http://www.foia.com/osram/usamap.asp>
For further information contact your local SYLVANIA sales representative.

LEDVANCE LLC

200 Ballardvale Street

Wilmington, MA 01887 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.sylvania.com

Product Licensee of Trademark SYLVANIA in General Lighting.

SYLVANIA and LEDVANCE are registered trademarks.

All other trademarks are those of their respective owners.

Specifications subject to change without notice.

