LED LAMPS

ProLED®
Omnidirectional A-Shape Series

Dimmable | Omnidirectional | Enclosed Rated | ENERGY STAR®

ProLED® Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination

Omnidirectional Optical Design Provides 230° Light Distribution

UL Listed for Damp Location & Enclosed Fixtures

ENERGY STAR® Certified

Backed by a 3-Year Warranty

Applications:

Home
Education
Healthcare
Hospitality
Retail

Markets:

Residential
Commercial

Halco® LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 **www.halcolighting.com**

ProLED®
Omnidirectional A-Shape Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 230˚ degree beam angle creates uniform distribution of light
- 3-year warranty
- 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
- Rated for ICAT fixtures

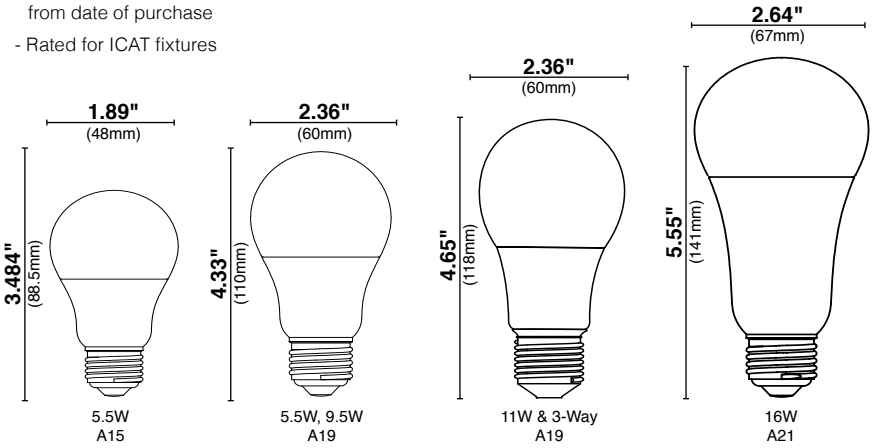

Savings Comparison

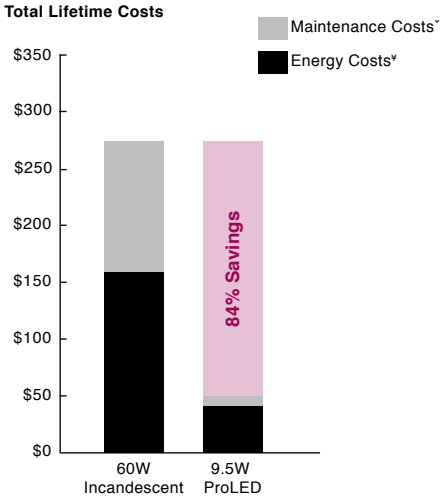

˅ Maintenance costs based on 15 minutes at $40 per/hr
¥ Energy costs based on $0.11 kWh

Ordering Information

	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage
	A15												
✪	5.5W	Medium	80196•	A15FR5/827/OMNI2/LED	120	2700K	82	450	25,000	230°	1/6	3.484"	40
✪	5.5W	Medium	80197•	A15FR5/830/OMNI2/LED	120	3000K	82	450	25,000	230°	1/6	3.484"	40
✪	5.5W	Medium	80198•	A15FR5/840/OMNI2/LED	120	4000K	82	450	25,000	230°	1/6	3.484"	40
✪	5.5W	Medium	80199•	A15FR5/850/OMNI2/LED	120	5000K	82	450	25,000	230°	1/6	4.484"	40
	A19												
✪	5.5W	Medium	81153	A19FR5/827/OMNI2/LED	120	2700K	82	450	15,000	230°	1/6	4.53"	40
✪	5.5W	Medium	81154	A19FR5/830/OMNI2/LED	120	3000K	82	470	15,000	230°	1/6	4.53"	40
✪	9.5W	Medium	81155	A19FR9/827/OMNI2/LED	120	2700K	82	800	15,000	230°	1/6	4.53"	60
✪	9.5W	Medium	81156	A19FR9/830/OMNI2/LED	120	3000K	82	830	15,000	230°	1/6	4.53"	60
✪	9.5W	Medium	81157	A19FR9/840/OMNI2/LED	120	4000K	82	860	15,000	230°	1/6	4.53"	60
✪	9.5W	Medium	81158	A19FR9/850/OMNI2/LED	120	5000K	82	900	15,000	230°	1/6	4.53"	60
✪	11W	Medium	81147	A19FR11/827/OMNI2/LED	120	2700K	82	1100	15,000	230°	1/6	4.65"	75
✪	11W	Medium	81148	A19FR11/830/OMNI2/LED	120	3000K	82	1140	15,000	230°	1/6	4.65"	75
	A21												
✪	16W	Medium	81151	A21FR16/827/OMNI2/LED	120	2700K	82	1600	15,000	230°	1/6	5.28"	100
✪	16W	Medium	81149	A21FR16/830/OMNI2/LED	120	3000K	82	1650	15,000	230°	1/6	5.28"	100
✪	16W	Medium	81150	A21FR16/840/OMNI2/LED	120	4000K	82	1720	15,000	230°	1/6	5.28"	100
✪	16W	Medium	81152	A21FR16/850/OMNI2/LED	120	5000K	82	1800	15,000	230°	1/6	5.28"	100
	3-Way												
✪	4.2/8.5/13.5W	Medium	83090	A19FR5/9/14/827/3-WAY/LED •	120	2700K	82	450/800/1500	15,000	230°	1/6	4.64"	40/60/100
✪	4.2/8.5/13.5W	Medium	83091	A19FR5/9/14/830/3-WAY/LED •	120	3000K	82	450/800/1500	15,000	230°	1/6	4.64"	40/60/100
✪	4.2/8.5/13.5W	Medium	83092	A19FR5/9/14/840/3-WAY/LED •	120	4000K	82	480/880/1550	15,000	230°	1/6	4.64"	40/60/100
✪	4.2/8.5/13.5W	Medium	83093	A19FR5/9/14/850/3-WAY/LED •	120	5000K	82	480/880/1550	15,000	230°	1/6	4.64"	40/60/100

✪ NEW ITEM!
• Not rated for enclosed fixtures.
* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.
Represents lamps that are ENERGY STAR® certified.
Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.
• 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.
25,000 hour useful life rating is based on a maximum ambient temperature of 45ºC. Exceeding this ambient temperature rating may result in reduced life.

Halco Lighting Technologies 2940 Pacific Drive I Norcross, GA 30071 I Toll Free 800.677.3334 I Phone 770.242.3612 I Fax 800.880.0822 I halcolighting.com I Atlanta I Carlstadt I Chicago I Cleveland I Houston I Los Angeles I Phoenix
© 2017 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 06-22-17. Re-order #9090.