INCANDESCENT LAMPS

CONTENTS

136 How to Read a Table

137 General Service Lamps

147 Decorative Lamps

150 Bulb, Base and Filament Identification

151 Symbols, Footnotes and Abbreviations

HOW TO READ AN INCANDESCENT LAMP TABLE

BULB
Designations indicate shape and size. Illustrations can be found on page 150 and at the top of each page.

BASE
Indicates base type. Full base descriptions and illustrations can be found on page 150.

PRODUCT CODE
Abbreviated product description can also be used for ordering. A key to abbreviations can be found on page 152.

PACKAGE QUANTITY
Indicates minimum sell quantity and smallest shipping carton.

VOLTS
Indicate the product's design voltage of operation.

DESIGN FILAMENT
Filament types are illustrated on page 150.

MOL
Indicates maximum overall length in inches.

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
7.5 WATT												
S11	**Med.**	7017		**S11CL7.5**	Clear	25/500	130	45	1500	C-7A	2.25"	-
		7024		**S11GRN7.5C**	Ceramic Green	25/500	130	-	1500	C-7A	2.25"	-
		7026		**S11ORG7.5C**	Ceramic Orange	25/500	130	-	1500	C-7A	2.25"	-
		7019		**S11RED7.5C**	Ceramic Red	25/500	130	-	1500	C-7A	2.25"	-
		7020		**S11WH7.5C**	Ceramic White	25/500	130	-	1500	C-7A	2.25"	-

WATTS
Indicates the power consumed by the lamp during operation.

PRODUCT NUMBER
Use this number when placing an order.

FOOTNOTES & SYMBOLS
Related footnotes can be found on page 151.

DESCRIPTION
Bulb finish and other important information.

LUMENS
Represents average light output.

AVERAGE LIFE
Average rated life expressed in hours.

BEAM SPREAD
Indicates the beam angle or beam spread of a bulb, measured in degrees.

INCANDESCENT LAMPS

General Service


C7/C9
Cand.

S6
S11
Cand.

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
4 WATT												
C7	**Cand.**	7014		**C7CL4**	Clear	25/1000	130	16	1000	C-3A	2.12”	-
5 WATT												
C7	**Cand.**	7102		**C7AMB5T**	Transparent Amber	25/1000	130	-	1000	C-3A	2.12”	-
		7104		**C7BLU5C**	Ceramic Blue	25/1000	130	-	1000	C-3A	2.12”	-
		7106		**C7BLU5T**	Transparent Blue	25/1000	130	-	1000	C-3A	2.12”	-
		7108		**C7GRN5C**	Ceramic Green	25/1000	130	-	1000	C-3A	2.12”	-
		7110		**C7GRN5T**	Transparent Green	25/1000	130	-	1000	C-3A	2.12”	-
		7112		**C7ORG5C**	Ceramic Orange	25/1000	130	-	1000	C-3A	2.12”	-
		7114		**C7RED5C**	Ceramic Red	25/1000	130	-	1000	C-3A	2.12”	-
		7116		**C7RED5T**	Transparent Red	25/1000	130	-	1000	C-3A	2.12”	-
		7118		**C7WH5C**	Ceramic White	25/1000	130	-	1000	C-3A	2.12”	-
6 WATT												
S6	**Cand.**	9042		**S6CL6**	Clear	25/2000	130	30	1500	C-7A	1.87”	-
		9043		**S6CL6/145V**	Clear	25/2000	145	30	1500	C-7A	1.87”	-
7 WATT												
C7	**Cand.**	7016		**C7CL7**	Clear	25/1000	130	40	1000	C-3A	2.12”	-
		105204		**C7WH7/NL**	White Night Light	25/2000	130	-	1000	C-3A	2.12”	-
C9	**Int.**	7050		**C9CL7**	Clear	25/1000	130	40	3000	C-3A	3.00”	-
		7120		**C9AMB7T**	Transparent Amber	25/1000	130	-	3000	C-3A	3.00”	-
		7122		**C9BLU7C**	Ceramic Blue	25/1000	130	-	3000	C-3A	3.00”	-
		7124		**C9BLU7T**	Transparent Blue	25/1000	130	-	3000	C-3A	3.00”	-
		7126		**C9GRN7C**	Ceramic Green	25/1000	130	-	3000	C-3A	3.00”	-
		7128		**C9GRN7T**	Transparent Green	25/1000	130	-	3000	C-3A	3.00”	-
		7130		**C9ORG7C**	Ceramic Orange	25/1000	130	-	3000	C-3A	3.00”	-
		7132		**C9RED7C**	Ceramic Red	25/1000	130	-	3000	C-3A	3.00”	-
		7134		**C9RED7T**	Transparent Red	25/1000	130	-	3000	C-3A	3.00”	-
7.5 WATT												
S11	**Med.**	7017		**S11CL7.5**	Clear	25/500	130	45	1500	C-7A	2.25”	-
		7024		**S11GRN7.5C**	Ceramic Green	25/500	130	-	1500	C-7A	2.25”	-
		7026		**S11ORG7.5C**	Ceramic Orange	25/500	130	-	1500	C-7A	2.25”	-
		7019		**S11RED7.5C**	Ceramic Red	25/500	130	-	1500	C-7A	2.25”	-
		7020		**S11WH7.5C**	Ceramic White	25/500	130	-	1500	C-7A	2.25”	-
		7028		**S11YEL7.5C**	Ceramic Yellow	25/500	130	-	1500	C-7A	2.25”	-
10 WATT												
S11	**Int.**	9045		**S11CL10**	Clear	25/500	130	80	1500	C-7A	2.48”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

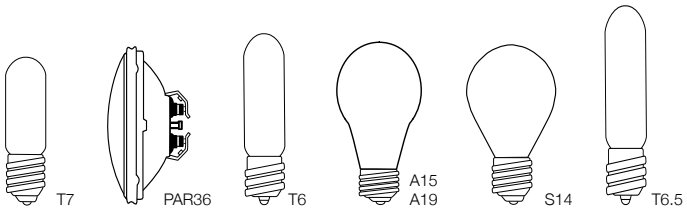

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
11 WATT												
S14	**Med.**	9051		**S14CL11**	Clear	25/250	130	80	5000	C-9	3.50”	-
		9057		**S14FR11**	Frost	25/250	130	75	3000	C-9	3.50”	-
		9056		**S14AMB11T**	Transparent Amber	25/250	130	-	3000	C-9	3.50”	-
		9076		**S14BLU11C**	Ceramic Blue	25/250	130	-	3000	C-9	3.50”	-
		9055		**S14BLU11T**	Transparent Blue	25/250	130	-	3000	C-9	3.50”	-
		9070		**S14GRN11C**	Ceramic Green	25/250	130	-	3000	C-9	3.50”	-
		9054		**S14GRN11T**	Transparent Green	25/250	130	-	3000	C-9	3.50”	-
		105334		**S14RED11C**	Ceramic Red	25/250	130	-	3000	C-9	3.50”	-
		9052		**S14RED11T**	Transparent Red	25/250	130	-	3000	C-9	3.50”	-
		9058		**S14WH11C**	Ceramic White	25/250	130	-	3000	C-9	3.50”	-
		105336		**S14YEL11C**	Ceramic Yellow	25/250	130	-	3000	C-9	3.50”	-
		9053		**S14YEL11T**	Transparent Yellow	25/250	130	-	3000	C-9	3.50”	-
15 WATT												
A15	**Med.**	6013		**A15CL15**	Clear	20/120	130	95	3000	C-9	3.50”	-
		6014		**A15FR15**	Frost	20/120	130	90	3000	C-9	3.50”	-
T6	**Cand.**	9030		**T6CL15/CAN**	Clear	25/500	130	90	2000	C-5A	3.06”	-
		9021		**T6CL15/145V**	Clear	25/500	145	80	2000	C-5A	3.06”	-
T7	**Cand.**	9039		**T7CL15CAN**	Clear	25/1000	120	100	2000	C-5A	2.25”	-
	BA15d	9038		**T7CL15DC**	Clear	25/1000	120	100	2000	C-5A	2.35”	-
	Int.	9037		**T7CL15INT**	Clear	25/1000	120	100	2000	C-5A	2.35”	-
20 WATT												
PAR36	**Screw Term.**	107788	$,17	**HP36NSP20/HX**	Narrow Spot HaloXen®	12	12	260	5000	C-6	2.75”	12°
		107790	$,17	**HP36VNSP20/HX**	Very Narrow Spot HaloXen®	12	12	260	5000	C-6	2.75”	5°
		107792	$,17	**HP36WFL20/HX**	Wide Flood HaloXen®	12	12	260	5000	C-6	2.75”	32°
T6.5	**BA15d**	9022		**T6.5CL20DC**	Clear	25/500	130	150	2500	C-8	5.56”	-
		9023		**T6.5FR20DC**	Frost	25/500	130	150	2500	C-8	5.56”	-
	Int.	9019		**T6.5CL20INT**	Clear	25/500	130	150	2500	C-8	5.50”	-
		9028		**T6.5FR20INT**	Frost	25/500	130	150	2500	C-8	5.50”	-
25 WATT												
A15	**Med.**	6016		**A15CL25**	Clear	20/120	130	130	3000	C-9	3.50”	-
		6015		**A15FR25**	Frost	20/120	130	120	3000	C-9	3.50”	-
A19	**Med.**	6318		**A19CL25/5**	Clear	120	130	175	5000	C-9	4.25”	-
		103700	AI	**A19FR25**	Frost	120	130	160	1500	C-9	4.25”	-
		6319		**A19FR25/5**	Frost	120	130	150	5000	C-9	4.25”	-
		101159	10	**A19FR25/12V**	Frost	12/240	12	240	2000	C-6	4.25”	-
		101150		**A19BLU25T**	Transparent Blue	12/120	130	-	2000	C-9	4.25”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

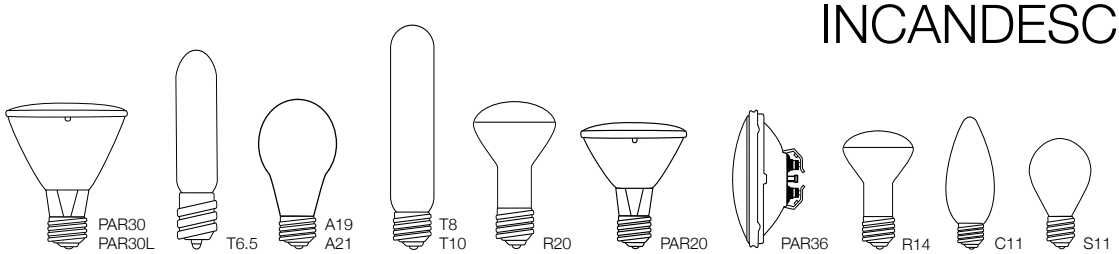

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
25 WATT continued												
A19	**Med.**	101152		**A19GRN25T**	Transparent Green	12/120	130	-	2000	C-9	4.25”	-
		6335		**A19RED25C**	Ceramic Red	12/120	130	-	2000	C-9	4.25”	-
		101154		**A19RED25T**	Transparent Red	12/120	130	-	2000	C-9	4.25”	-
		101124		**A19RS25/CS**	CoverShield®	20/120	130	-	2000	C-9	4.25”	-
		6338		**A19YEL25C**	Ceramic Yellow	12/120	130	-	2000	C-9	4.25”	-
		101156		**A19YEL25T**	Transparent Yellow	12/120	130	-	2000	C-9	4.25”	-
C11	**Cad.**	20003		**C11ANT25**	Antique Oil-Rubbed finish	10/100	120	120	3000	Z-Shape	4.00”	-
PAR36	**Screw Term.**	14554	10	**PAR36NSP25/M**	Narrow Spot Major	1/12	12	150	2000	C-6	2.75”	9°
		14556	10	**PAR36VWFL25/M**	Very Wide Flood Major	1/12	12	150	2000	C-6	2.75”	55°
		65205	10	**PAR36WFL25**	Wide Flood	1/12	12	150	2000	C-6	2.75”	25x37
R14	**Int.**	9104		**R14INT25**	Flood	25/250	130	150	1500	CC-2V	2.64”	-
	Med.	9103		**R14MED25**	Flood	25/250	130	150	1500	CC-2V	2.64”	-
S11	**Int.**	9048		**S11N25**	Clear High-Intensity	25/500	130	200	1500	CC-2V	2.48”	-
T6.5	**BA15d**	9025		**T6.5CL25DC**	Clear	25/500	130	180	2500	C-8	5.56”	-
	Int.	9018		**T6.5CL25INT**	Clear	25/500	130	180	2500	C-8	5.50”	-
T8	**BA15d**	9034		**T8CL25DC**	Clear	25/500	130	180	2500	C-8	2.63”	-
	Int.	9032		**T8CL25INT**	Clear	25/500	130	180	2500	C-8	2.63”	-
T10	**Med.**	9012		**T10CL25**	Clear	25/200	130	180	2500	C-5V	5.00”	-
		9013		**T10FR25**	Frost	25/200	130	180	2500	C-5V	5.00”	-
29 WATT												
A19	**Med.**	76005	Ⓔ $	**A19CL29/H**	Clear	12/120	120	430	1000	CC-8	4.25”	-
		76001	Ⓔ $	**A19SW29/H**	Soft White	12/120	120	430	1000	CC-8	4.25”	-
30 WATT												
R20	**Med.**	9110	6	**R20FL30**	Flood	10/100	130	140	3000	C-9	3.93”	-
		10102		**R20FL30/CS**	Flood CoverShield®	10/100	130	140	3000	C-9	3.93”	-
30/70/100 WATT												
A21	**Med.**	8009	1	**A21SW3W100**	Soft White 3-Way 30/70/100	12/60	130	260/ 650/940	2500	CC-8	5.25”	-
35 WATT												
PAR20	**Med.**	107610	N,$,18	**HP20NFL35**	Narrow Flood Prism®	15	130	450	3000	CC-8	3.07”	30°
PAR36	**Screw Term.**	107794	$,17	**HP36NSP35/HX**	Narrow Spot HaloXen®	1/12	12	540	5000	C-6	2.75”	12°
		107796	$,17	**HP36VNSP35/HX**	Very Narrow Spot HaloXen®	1/12	12	540	5000	C-6	2.75”	5°
		107798	$,17	**HP36WFL35/HX**	Wide Flood HaloXen®	1/12	12	540	5000	C-6	2.75”	32°
		70306	$,17	**HP36WFL35/24V**	Wide Flood	1/12	24	500	5000	CC-6	2.75”	32°

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service







Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
39 WATT												
PAR20	**Med.**	70343	$,†,17	**HP20NFL39/HX**	Narrow Flood HaloXen®	1/15	120	530	2000	CC-8	3.23”	30°
		70354	$,†,17	**HP20NFL39/HX/130**	Narrow Flood HaloXen®	1/15	130	530	2000	CC-8	3.23”	30°
PAR30	**Med.**	70347	$,†,17	**HP30FL39/HX**	Flood HaloXen®	1/15	120	530	2000	CC-8	3.62”	30°
		70353	$,†,17	**HP30FL39/HX/130**	Flood HaloXen®	1/15	130	530	2000	CC-8	3.62”	30°
PAR30L	**Med.**	70344	$,†,17	**HP30FL39L/HX**	Flood HaloXen®	1/15	120	530	2000	CC-8	4.75”	36°
		70204	$,†,17	**HP30WFL39L/HX**	Wide Flood HaloXen®	1/15	120	530	2000	CC-8	4.75”	50°
		70203	$,†,17	**HP30SP39L/HX**	Spot HaloXen®	1/15	120	530	2000	CC-8	4.75”	15°
		70356	$,†,17	**HP30FL39L/HX/130**	Flood HaloXen®	1/15	130	530	2000	CC-8	4.75”	36°
PAR38	**Med.**	70340	$,†,17	**HP38FL39/HX**	Flood HaloXen®	1/15	120	530	2000	CC-8	5.31”	30°
		70404	$,†,17	**HP38SP39/HX**	Spot HaloXen®	1/15	120	530	2000	CC-8	5.31”	10°
		70355	$,†,17	**HP38FL39/HX/130**	Flood HaloXen®	1/15	130	530	2000	CC-8	5.31”	30°
40 WATT												
A15	**Cand.**	10005		**A15CL40/E12**	Clear	20/120	120	350	2000	C-9	3.50”	-
		10006	X	**A15WH40/E12**	White	20/120	120	310	2000	C-9	3.50”	-
	Int.	10009	X	**A15CL40/E17**	Clear	20/120	120	350	2000	C-9	3.50”	-
	Med.	6017		**A15CL40**	Clear	20/120	130	300	3000	C-9	3.50”	-
		90300		**A15CL40/CSTF**	Clear CoverShield® PFA	20/120	130	300	3000	C-9	3.50”	-
		6018		**A15FR40**	Frost	20/120	130	290	3000	C-9	3.50”	-
		6146		**A15RS40/CS**	CoverShield®	20/120	130	-	1500	C-9	3.50”	-
A19	**Med.**	103710	L, Al	**A19CL40**	Clear	120	130	340	1500	C-9	4.25”	-
		6324		**A19CL40/5**	Clear	120	130	320	5000	C-9	4.25”	-
		103702	L, Al	**A19FR40**	Frost	120	130	325	1500	C-9	4.25”	-
		6320		**A19FR40/5**	Frost	120	130	275	5000	C-9	4.25”	-
		6220		**A19SW40/120**	Soft White	120	120	300	1500	CC-6	4.25”	-
		8013		**A19BG40**	Yellow Bug	20/120	130	-	2000	C-9	4.25”	-
		101151	X	**A19BLU40T**	Transparent Blue	12/120	130	-	2000	C-9	4.25”	-
		101153	X	**A19GRN40T**	Transparent Green	12/120	130	-	2000	C-9	4.25”	-
		101155		**A19RED40T**	Transparent Red	12/120	130	-	2000	C-9	4.25”	-
		101125		**A19RS40/CS**	CoverShield®	20/120	130	-	2000	C-9	4.25”	-
		6354	X	**A19YEL40C**	Ceramic Yellow	12/120	130	-	2000	C-9	4.25”	-
A21	**Med.**	20002		**A21ANT40**	Antique Oil-Rubbed finish	6/48	120	130	3000	Quad Loop	5.00”	-
R14	**Int.**	9101		**R14INT40**	Flood	25/250	130	260	1500	CC-2V	2.64”	-
	Med.	9100		**R14MED40**	Flood	25/250	130	260	1500	CC-2V	2.64”	-
R16	**Med.**	9127		**R16MED40**	Flood	25/500	130	235	3000	C-9	3.66”	-
		129127		**R16MED40/120**	Flood	25/500	120	235	3000	C-9	3.66”	-
		104106		**R16SP40**	Spot	25/500	130	235	3000	CC-2V	3.66”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.

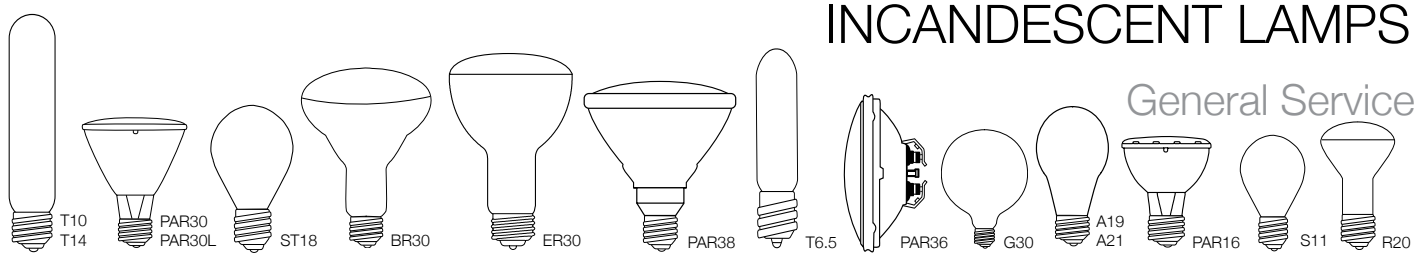

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
40 WATT continued												
T6.5	**Int.**	106111		**T6.5CL40INT**	Clear	25/500	130	350	2500	C-8	5.50”	-
T10	**Med.**	9014		**T10CL40**	Clear	25/200	130	280	2500	C-5V	5.00”	-
		9015		**T10FR40**	Frost	25/200	130	280	2500	C-5V	5.00”	-
		106228		**T10CL40/CS**	CoverShield®	25/200	130	-	-	C-5V	5.00”	-
G30	**Med.**	20004		**G30ANT40**	Antique Oil-Rubbed finish	50	120	140	3000	Squirrel Cage	5.13”	-
G40	**Med.**	20005		**G40ANT40**	Antique Oil-Rubbed finish	12	120	140	3000	Squirrel Cage	6.75”	-
S11	**Int.**	9050		**S11N40**	Clear High-Intensity	25/500	130	370	1500	CC-2V	2.48”	-
ST18	**Med.**	20006		**ST18ANT40**	Antique Oil-Rubbed finish	10/100	120	135	3000	Squirrel Cage	5.16”	-
T14	**Med.**	20007		**T14ANT40**	Antique Oil-Rubbed finish	10/100	120	135	3000	Squirrel Cage	4.25”	-
43 WATT												
A19	**Med.**	76006	Ⓔ $	**A19CL43/H**	Clear	12/120	120	750	1000	CC-8	4.25”	-
		76004	Ⓔ $	**A19SW43/H**	Soft White	12/120	120	750	1000	CC-8	4.25”	-
45 WATT												
PAR16	**Med.**	107502	N, $,18	**HP16NFL45**	Narrow Flood Prism®	15	130	500	3000	CC-2V	3.07”	30°
R20	**Med.**	10100	6	**R20FL45**	Flood	10/100	130	450	3000	C-9	3.93”	-
50 WATT												
A19	**Med.**	101160	10	**A19FR50/12V**	Frost	12/240	12	580	1500	C-6	4.25”	-
		101123		**A19RS50**	Rough Service	20/120	130	580	2500	C-9	4.25”	-
BR30	**Med.**	104058	6	**BR30FL50**	Flood	24	130	300	5000	C-9	5.37”	-
ER30	**Med.**	9113	5,7	**ER30FL50/P5**	Flood Prism® Long Life Plus™	12/60	130	360	5000	C-9M	6.25”	-
PAR36	**Screw Term.**	107782	17	**HP36NSP50/HX**	Narrow Spot HaloXen®	1/12	12	910	5000	C-6	2.75”	12°
		107784	17	**HP36VNSP50/HX**	Very Narrow Spot HaloXen®	1/12	12	910	5000	C-6	2.75”	5°
		107786	17	**HP36WFL50/HX**	Wide Flood HaloXen®	1/12	12	910	5000	C-6	2.75”	32°
		65210	10	**PAR36WFL50**	Wide Flood	1/12	12	330	2000	C-6	2.75”	39x27
PAR38	**Med.**	70350	Ⓔ †,17	**HP38FL50/S/HX**	Silver PAR Flood HaloXen®	1/15	120	920	1500	CC-8	5.31”	30°
R20	**Med.**	104200	6	**R20AMB50**	Amber	10/100	130	-	2500	C-9	3.93”	-
		9146	6	**R20BLU50**	Blue	10/100	130	-	2500	C-9	3.93”	-
		9150	6	**R20DPNK50**	Dawn Pink	10/100	130	-	2500	C-9	3.93”	-
		9141	6	**R20GRN50**	Green	10/100	130	-	2500	C-9	3.93”	-
		9108	6	**R20PNK50**	Pink	10/100	130	-	2500	C-9	3.93”	-
		9142	6	**R20RED50**	Red	10/100	130	-	2500	C-9	3.93”	-
		104016	6	**R20FL50/CS**	CoverShield®	10/100	130	-	2000	C-9	3.93”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

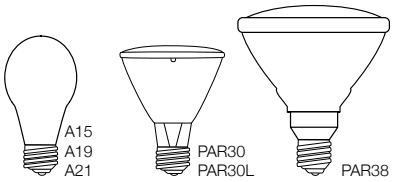

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
50/100/150 WATT												
A21	**Med.**	8010	1	**A21SW3W150**	Soft White 3-Way 50/100/150	12/60	130	560/ 1200/ 1760	2500	CC-8	5.25”	-
		101240	X,N,1	**A21FR50/150/ND**	Frost 3-Way 50/100/150 Neodymium PureLite®	12/60	120	380/ 1000/ 1380	5000	CC-8	5.25”	-
53 WATT												
A19	**Med.**	76007	Ⓔ$	**A19CL53/H**	Clear	12/120	120	1050	1000	CC-8	4.25”	-
		76002	Ⓔ$	**A19SW53/H**	Soft White	12/120	120	1050	1000	CC-8	4.25”	-
PAR30	**Med.**	70310	Ⓔ †,17	**HP30FL53/XIR**	Flood XIR®	1/15	120	1050	3500	CC-8	3.62”	30°
PAR30L	**Med.**	70311	Ⓔ †,17	**HP30FL53L/XIR**	Flood XIR®	1/15	120	930	3500	CC-8	4.75”	30°
PAR38	**Med.**	70312	Ⓔ †,17	**HP38FL53/XIR**	Flood XIR®	1/15	120	960	3500	CC-8	5.31”	25°
54 WATT												
A19	**Med.**	288584	$	**A19FR54/10**	Frost Prism® Ultra Life®	20/120	130	450	10000	C-9M	4.25”	-
60 WATT												
A15	**Cand.**	10007		**A15CL60/E12**	Clear	20/120	120	530	2000	C-9	3.50”	-
		10008		**A15WH60/E12**	White	20/120	120	520	2000	C-9	3.50”	-
	Med.	6117		**A15CL60**	Clear	20/120	130	530	3000	C-9	3.50”	-
		126117		**A15CL60/120**	Clear	20/120	120	620	3000	C-9	3.50”	-
		101234	X, N	**A15CL60/ND**	Clear Neodymium PureLite®	10/50	120	530	5000	CC-9	3.50”	-
		6118		**A15FR60**	Frost	20/120	130	520	3000	C-9	3.50”	-
		6147		**A15RS60/CS**	CoverShield®	20/120	130	-	1500	C-9	3.50”	-
A19	**Med.**	103712	L, Al	**A19CL60**	Clear	120	130	620	1500	C-9	4.25”	-
		6225	L	**A19CL60/120**	Clear	120	120	590	1500	CC-6	4.25”	-
		6325	L	**A19CL60/5**	Clear	120	130	545	5000	C-9	4.25”	-
		103010	L	**A19CL60/P10**	Clear Prism® Ultra Life®	20/120	120	480	10000	C-9M	4.25”	-
		101242	N	**A19CL60/ND**	Clear Neodymium PureLite®	20/120	120	600	5000	CC-6	4.25”	-
		101180	3	**A19CL60/SB**	Clear Silver Bowl Prism®	12/120	130	-	2500	C-9	4.25”	-
		103704	L, Al	**A19FR60**	Frost	120	130	590	1500	C-9	4.25”	-
		6321	L	**A19FR60/5**	Frost	120	130	510	5000	C-9	4.25”	-
		103024	L	**A19FR60/P10**	Frost Prism® Ultra Life®	20/120	120	480	10000	C-9M	4.25”	-
		101194	N	**A19FR60/ND**	Frost Neodymium PureLite®	20/120	120	600	5000	CC-6	4.25”	-
		101184	3	**A19FR60/SB**	Inside Frost Silver Bowl Prism®	12/120	130	-	5000	C-9	4.25”	-
		6221	L	**A19SW60/120**	Soft White	120	120	530	1500	C-9	4.25”	-
		8011		**A19BG60**	Yellow Bug	20/120	130	-	2000	C-9	4.25”	-
		101196	X	**A19GRO60**	Plant Grow	12/120	120	480	2000	C-9	4.25”	-
		6352		**A19RED60C**	Ceramic Red	12/120	130	-	2000	C-9	4.25”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

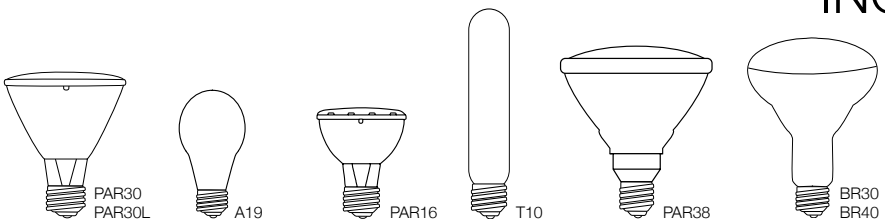

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
60 WATT continued												
A19	**Med.**	6151		**A19RS60**	Rough Service	20/120	130	780	2500	C-9	4.25”	-
		6141		**A19RS60/CS**	CoverShield®	20/120	130	-	2000	C-9	4.25”	-
		6356		**A19YEL60C**	Ceramic Yellow	12/120	130	-	2000	C-9	4.25”	-
PAR16	**Med.**	107616	N,$,18	**HP16NFL60**	Narrow Flood Prism®	15	130	550	3000	CC-8	3.07”	30°
		107850	N,$,18	**HP16NFL60/120**	Narrow Flood Prism®	15	120	550	3000	CC-8	3.07”	30°
		107504	N,$,18	**HP16NSP60**	Narrow Spot Prism®	15	130	550	3000	CC-8	3.07”	10°
T10	**Med.**	9016		**T10CL60**	Clear	25/200	130	420	2500	C-5V	5.00”	-
		9017		**T10FR60**	Frost	25/200	130	420	2500	C-5V	5.00”	-
PAR30	**Med.**	70345	Ⓔ † $,17	**HP30FL60/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	3.62”	30°
PAR30L	**Med.**	70342	Ⓔ † $,17	**HP30FL60L/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	4.75”	36°
		70349	Ⓔ † $,17	**HP30WFL60L/S/HX**	Silver PAR Wide Flood HaloXen®	1/15	120	1090	1500	CC-8	4.75”	50°
		70348	Ⓔ † $,17	**HP30SP60L/S/HX**	Silver PAR Spot HaloXen®	1/15	120	1090	1500	CC-8	4.75”	15°
PAR38	**Med.**	70341	Ⓔ † $,17	**HP38FL60/S/HX**	Siver PAR Flood HaloXen®	1/15	120	1090	1500	CC-8	5.31”	30°
65 WATT												
BR30	**Med.**	104070	6	**BR30FL65**	Flood	24	130	580	5000	C-9	5.37”	-
		124070	6	**BR30FL65/120**	Flood	24	120	510	5000	C-9	5.37”	-
		75009	†,19	**BR30FL65/H**	Flood	24	120	750	2500	CC-8	5.37”	-
		103620	6	**BR30FL65/P5**	Flood Prism® Long Life Plus	24	130	480	5000	C-9M	5.37”	-
		103110	6	**BR30FL65/P10**	Flood Prism® Ultra Life®	24	120	420	10000	C-9M	5.37”	-
		103528	N, 6	**BR30FL65/20**	Flood Prism® Ultra Life®	24	120	480	20000	C-9M	5.37”	-
		404014	6	**BR30SP65/5**	Spot	24	130	-	5000	C-9	5.37”	-
		404028	6	**BR30AMB65/5**	Amber Prism®	12/24	130	-	5000	C-9	5.37”	-
		404030	6	**BR30BLU65/5**	Blue Prism®	12/24	130	-	5000	C-9	5.37”	-
		404031	6	**BR30DPNK65/5**	Dawn Pink Prism®	12/24	130	-	5000	C-9	5.37”	-
		404039	6	**BR30GRN65/5**	Green Prism®	12/24	130	-	5000	C-9	5.37”	-
		404046	6	**BR30PNK65/5**	Pink Prism®	12/24	130	-	5000	C-9	5.37”	-
		404049	6	**BR30RED65/5**	Red Prism®	12/24	130	-	5000	C-9	5.37”	-
		404051	6	**BR30FL65/CS**	CoverShield® Prism®	1/24	130	-	5000	C-9	5.37”	-
		404053	6	**BR30YEL65/5**	Yellow Prism®	12/24	130	-	5000	C-9	5.37”	-
BR40	**Med.**	404076	6	**BR40FL65/P5**	Flood Prism® Long Life Plus	24	130	550	5000	C-9M	6.56”	-
		75010	†,19	**BR40FL65/H**	Flood	24	120	750	2500	CC-8	6.56”	-
68 WATT												
A19	**Med.**	288580	11	**A19FR68/10**	Frost Prism® Ultra Life®	20/120	130	630	10000	C-9M	4.25”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.

Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service



Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
70 WATT												
PAR38	**Med.**	70346	Ⓔ† $,17	**HP38FL70/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1350	1500	CC-8	5.31”	30°
		70352	Ⓔ† $,17	**HP38SP70/S/HX**	Silver PAR Spot HaloXen®	1/15	120	1350	1500	CC-8	5.31”	10°
72 WATT												
A19	**Med.**	76000	Ⓔ$	**A19CL72/H**	Clear	12/120	120	1490	1000	CC-8	4.25”	-
		76003	Ⓔ$	**A19SW72/H**	Soft White	12/120	120	1490	1000	CC-8	4.25”	-
75 WATT												
A19	**Med.**	103714	L, Al	**A19CL75**	Clear	120	130	860	1500	C-9	4.25”	-
		6326	L	**A19CL75/5**	Clear	120	130	700	5000	C-9	4.25”	-
		103706	L, Al	**A19FR75**	Frost	120	130	820	1500	C-9	4.25”	-
		6322	L	**A19FR75/5**	Frost	120	130	680	5000	C-9	4.25”	-
		6222	L	**A19SW75/120**	Soft White	120	120	780	1500	CC-6	4.25”	-
		6152		**A19RS75**	Rough Service	20/120	130	1100	2500	C-9	4.25”	-
		6142		**A19RS75/CS**	CoverShield®	20/120	130	-	2000	C-9	4.25”	-
A21	**Med.**	101248	N	**A21FR75/ND**	Frost Neodymium PureLite®	12/60	120	710	5000	CC-6	5.00”	-
80 WATT												
PAR38	**Med.**	70351	Ⓔ† $,17	**HP38FL80/S/HX**	Silver PAR Flood HaloXen®	1/15	120	1580	1500	CC-8	5.31”	30°
100 WATT												
A19	**Med.**	6327	L	**A19CL100/5**	Clear	120	130	1000	5000	C-9	4.25”	-
		101182	3,8	**A19CL100/SB**	Clear Silver Bowl Prism®	12/120	130	830	5000	C-9	4.25”	-
		6323	L	**A19FR100/5**	Frost	120	130	980	5000	C-9	4.25”	-
		103028	L	**A19FR100/P10**	Frost Prism® Ultra Life®	20/120	120	870	10000	C-9M	4.25”	-
		6223	X	**A19SW100/120**	Soft White	120	120	1050	1500	CC-6	4.25”	-
		6153		**A19RS100**	Rough Service	20/120	130	1150	2500	C-9	4.25”	-
		6143		**A19RS100/CS**	CoverShield®	20/120	130	-	2500	C-9	4.25”	-
A21	**Med.**	101246	N	**A21CL100/ND**	Clear Neodymium PureLite®	12/60	120	1050	5000	CC-6	5.00”	-
		103576	X	**A21FR100/P5**	Frost Prism® Long Life Plus™	12/60	130	1050	5000	C-9M	5.00”	-
		101197	N	**A21FR100/ND**	Frost Neodymium PureLite®	12/60	120	1050	5000	CC-6	5.00”	-
		101190	3,8	**A21FR100/SB**	Inside Frost Silver Bowl Prism®	12/60	130	800	5000	C-9	5.00”	-
		6041		**A21RS100/P5/CS**	CoverShield® Prism®	12/60	130	-	5000	C-9M	5.00”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

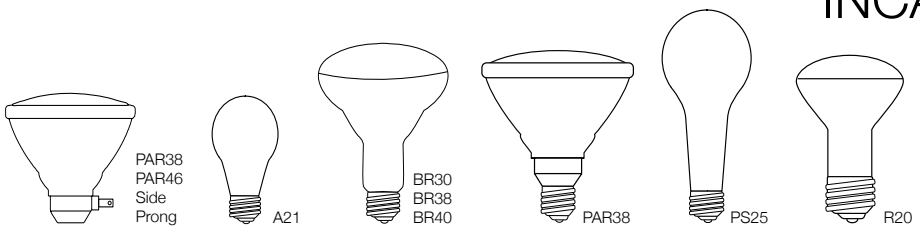

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
100 WATT continued												
BR30	**Med.**	104026	6,10	**BR30CL100/12V**	Clear Pool Lamp	12/24	12	1200	2000	C-6	5.37”	-
BR38	**Med.**	404112	9	**BR38AMB100**	Amber Flood	12/24	130	-	5000	C-9	5.50”	-
		404113	9	**BR38BLU100**	Blue Flood	12/24	130	-	5000	C-9	5.50”	-
		404114	9	**BR38GRN100**	Green Flood	12/24	130	-	5000	C-9	5.50”	-
		404116	9	**BR38RED100**	Red Flood	12/24	130	-	5000	C-9	5.50”	-
		404119	9	**BR38YEL100**	Yellow Flood	12/24	130	-	5000	C-9	5.50”	-
R20	**Med.**	104020	2,6,10	**R20CL100/12V**	Clear Pool Lamp	10/100	12	950	2000	C-6	3.55”	-
100/200/300 WATT												
PS25	**Mog.**	8005	1	**PS25SW3W300**	Soft White 3-Way 100/200/300 Prism®	12/60	120	1200/ 2600/ 3800	1200	CC-6	6.93”	-
120 WATT												
BR40	**Med.**	404065	6	**BR40FL120/5/CS**	CoverShield®	1/24	120	-	5000	C-9	6.56”	-
PAR38	**Side Prong**	65058	X,4,13	**PAR38/3SP120**	Spot	1/12	120	1370	2000	CC-6	4.30”	18°
		65059	X,4,13	**PAR38/3FL120**	Flood	1/12	120	1370	2000	CC-6	4.30”	30°
125 WATT												
BR40	**Med.**	204035	6,11	**BR40CL125/1**	Clear Infrared Prism®	12	120	-	6000	C-9	6.56”	-
150 WATT												
A21	**Med**	6043		**A21RS150/P5/CS**	CoverShield®	1/60	130	-	5000	C-9M	5.00”	-
PS25	**Med.**	401345	3	**PS25CL150/P5/CS**	CoverShield® Prism® Long Life Plus™	1/60	130	-	5000	C-9M	6.93”	-
		104012	X	**R40GRO150**	Plant Grow	12	120	-	5000	C-9	6.56”	-
200 WATT												
PAR46	**Side Prong**	65064	4,13	**PAR46/3MFL200**	Medium Flood	1/12	120	2270	2000	CC-13	4.00”	25x15
		65065	4,13	**PAR46/3NSP200**	Narrow Spot	1/12	120	2270	2000	CC-13	4.00”	12x8
PS25	**Med.**	401347	3	**PS25CL200/P5/CS**	CoverShield® Prism® Long Life Plus™	1/60	130	-	5000	C-9M	6.93”	-
250 WATT												
BR40	**Med.**	404068	6,11	**BR40CL250/1**	Clear Heat Prism®	12	120	-	5000	C-9	6.56”	-
		404066	6,11,16	**BR40CL250/1/CSTF**	Clear CoverShield® PFA Prism®	1/12	120	-	5000	C-9	6.56”	-
PAR38	**Med.**	15558		**Q250PAR/FL**	Flood Major	1/6	120	3600	4200	CC-8	5.31”	30°
		15526		**Q250PAR/SP**	Spot Major	1/6	120	3600	4200	CC-8	5.31”	10°
R40	**Med.**	104044	6,11	**R40RED250/10**	Red Heat Prism®	12	120	-	5000	C-9	6.56”	-
		404071	6,11,16	**R40RED250/10/CSTF**	Red CoverShield® PFA Prism®	1/12	120	-	5000	C-9	6.56”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

General Service

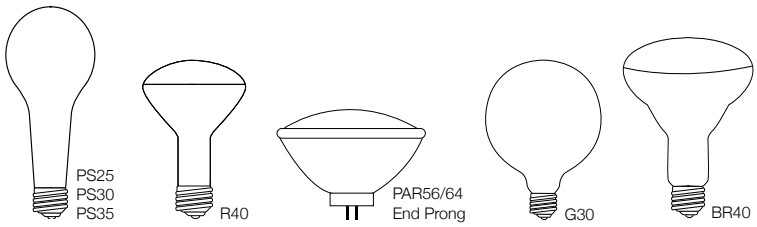

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
300 WATT												
PAR56	**Mog. End Prong**	65220	4,13	**PAR56MFL300**	Medium Flood	1/12	120	3840	2000	CC-13	5.00”	25x11
		65042	4,13	**PAR56NSP300**	Narrow Spot	1/12	120	3840	2000	CC-13	5.00”	10x8
		65230	4,13	**PAR56WFL300**	Wide Flood	1/12	120	3840	2000	CC-13	5.00”	35x20
	Screw Term.	65225	4,10,13	**PAR56WFL300/12**	Wide Flood	1/12	12	6000	1000	C-6	4.50”	35x20
PS25	**Med.**	401305		**PS25CL300/P5**	Clear Prism® Long Life Plus™	12/60	130	3600	5000	C-9M	6.93”	-
		401306		**PS25FR300/P5**	Frost Prism® Long Life Plus™	12/60	130	3600	5000	C-9M	6.93”	-
PS30	**Med.**	401308		**PS30CL300/P5**	Clear Prism® Long Life Plus™	12/60	130	3600	5000	C-9M	8.06”	-
		401310		**PS30FR300/P5**	Frost Prism® Long Life Plus™	12/60	130	3600	5000	C-9M	8.06”	-
PS35	**Mog.**	401316		**PS35CL300/P5**	Clear Prism® Long Life Plus™	6/24	130	3600	5000	C-9M	9.37”	-
		401318		**PS35FR300/P5**	Frost Prism® Long Life Plus™	6/24	130	3600	5000	C-9M	9.37”	-
R40	**Med.**	104040	5,7,10,12,14	**R40FL300/12V**	Flood Pool Lamp	12/24	12	3000	2000	C-6	6.56”	-
		104035	5,7,12,14	**R40FL300/HG**	Flood Hard Glass	12/24	130	3000	3000	C-6	6.56”	-
375 WATT												
R40	**Med.**	104048	6,7,11,14	**R40CL375**	Clear Infrared Prism®	12/24	120	-	5000	C-9	6.56”	-
		104050	6,7,11,14,16	**R40CL375/CSTF**	CoverShield® PFA Prism®	1/12	120	-	5000	C-9	6.56”	-
400 WATT												
G30	**Med.**	5508	15	**400G/FL**	Clear	1/100	120	6800	800	C-5	5.10”	-
R40	**Med.**	104038	5,12,14	**R40FL400/HG**	Flood Hard Glass	12/24	120	4150	2000	CC-9	6.56”	-
500 WATT												
PAR56	**Mog. End Prong**	843494	X 4,13	**PAR56Q500NSP**	Narrow Spot	1/6	120	8000	4000	CC-6	5.00”	13x8
PAR64	**Mog. End Prong**	839409	13	**PAR64MFL500**	Medium Flood Major	1/12	120	6500	2000	CC-13	6.00”	23x11
		14938	13	**PAR64NSP500**	Narrow Spot Major	1/12	120	6500	2000	CC-13	6.00”	12x7
R40	**Med.**	104042	5,12,14	**R40FL500/HG**	Flood Hard Glass	12/24	120	5400	2000	CC-9	6.56”	-
	Mog.	821734	5,12,14	**R40FL500/3FL**	Flood Major	1/24	120	6500	2000	C-2V	7.25”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.

Incandescent lamp symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

Decorative

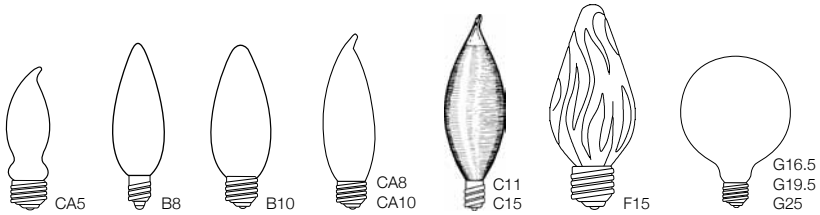

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
3 WATT												
CA5	**Cand.**	2502	2	**CFTC3**	Clear Flicker Flame	25/500	130	-	1500	-	2.88”	-
CA10	**Cand.**	2008	2	**CFC3**	Clear Flicker Flame	25/500	130	-	1500	-	4.12”	-
	Med.	2510	2	**EFC3**	Clear Flicker Flame	25/500	130	-	1500	-	4.12”	-
7.5 WATT												
CA5	**Cand.**	2005	2	**CFTC7.5**	Clear	50/1000	130	40	1500	C-7A	2.88”	-
CA8	**Cand.**	2000	2	**CFCP7.5**	Clear 25mm	25/500	130	35	2000	C-7A	3.58”	-
15 WATT												
B8	**Cand.**	1020	2	**CTCP15**	Clear 25mm	25/500	130	95	3000	C-7A	3.15”	-
B10	**Cand.**	1001	2	**CTC15**	Clear 32mm	25/500	130	95	3000	C-7A	3.87”	-
CA8	**Cand.**	2020	2	**CFCP15**	Clear 25mm	25/500	130	95	3000	C-7A	3.58”	-
CA10	**Cand.**	2001	2	**CFC15**	Clear 32mm	25/500	130	95	3000	C-7A	4.12”	-
G16.5	**Cand.**	4001	2	**G16CL15**	Clear	25/500	130	95	3000	C-7A	3.00”	-
		4015	2	**G16WH15**	White	25/500	130	80	3000	C-7A	3.00”	-
25 WATT												
B8	**Cand.**	1021	2	**CTCP25**	Clear 25mm	25/500	130	220	3000	CC-2V	3.15”	-
B10	**Cand.**	1003	2	**CTC25**	Clear 32mm	25/500	130	220	3000	CC-2V	3.87”	-
		101280	X,N,2	**CTC25/ND**	Clear Neodymium PureLite®	10/50	120	140	5000	CC-2V	3.87”	-
		100192	2	**CTF25**	Frost 32mm	25/500	130	220	3000	CC-2V	3.87”	-
	E14	121023		**CTC25/E14**	Clear 32mm	25/500	120	220	3000	CC-2V	3.87”	-
	Med.	1012	2	**ETC25**	Clear 32mm	25/500	130	220	3000	CC-2V	3.87”	-
		1013	2	**ETF25**	Frost 32mm	25/500	130	220	3000	CC-2V	3.87”	-
CA8	**Cand.**	2021	2	**CFCP25**	Clear 25mm	25/500	130	220	3000	CC-2V	3.58”	-
CA10	**Cand.**	2003	2	**CFC25**	Clear 32mm	25/500	130	220	3000	CC-2V	4.12”	-
		2040	2,10	**CFC25/12V**	Clear 32mm	25/500	12	200	2000	C-6	4.12”	-
		2004	2	**CFF25**	Frost 32mm	25/500	130	220	3000	CC-2V	4.12”	-
	Med.	2012	2	**EFC25**	Clear 32mm	25/500	130	220	3000	CC-2V	4.12”	-
		2013	2	**EFF25**	Frost 32mm	25/500	130	220	3000	CC-2V	4.12”	-
C11	**Cand.**	100210	2	**C11SG25**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.02”	-
C15	**Med.**	100214	2	**C15SG25**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.49”	-
F15	**Med.**	3001	2	**F15CL25**	Clear	25/250	130	140	3000	C-9	4.50”	-
		3003	2	**F15AMB25**	Amber	25/250	130	-	3000	C-9	4.50”	-
G16.5	**Cand.**	4002	2	**G16CL25**	Clear	25/500	130	220	3000	CC-2V	3.00”	-
		101270	X,N,2	**G16CL25/ND**	Clear Neodymium PureLite®	10/50	120	140	5000	CC-2V	3.00”	-
		4016	2	**G16WH25**	White	25/500	130	170	3000	CC-2V	3.00”	-
G25	**Med.**	5001		**G25CL25**	Clear	10/100	130	150	3500	C-9	4.50”	-
		5002		**G25WH25**	White	10/100	130	140	3500	C-9	4.50”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.

Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

Decorative

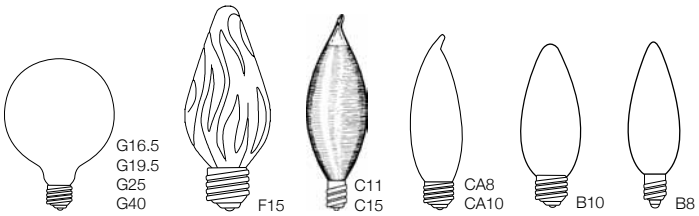

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
40 WATT												
B8	**Cand.**	1023	2	**CTCP40**	Clear 25mm	25/500	130	370	3000	CC-2V	3.15”	-
B10	**Cand.**	1006	2	**CTC40**	Clear 32mm	25/500	130	370	3000	CC-2V	3.87”	-
		1007	2	**CTF40**	Frost 32mm	25/500	130	370	3000	CC-2V	3.87”	-
	E14	121025	X, 2	**CTC40/E14**	Clear 32mm	25/500	130	370	3000	CC-2V	3.87”	-
	Med.	1015	2	**ETC40**	Clear 32mm	25/500	130	370	3000	CC-2V	3.87”	-
		102148	2	**ETC40/CS**	Clear CoverShield®	25/500	130	-	3000	CC-2V	3.87”	-
		1016	2	**ETF40**	Frost 32mm	25/500	130	370	3000	CC-2V	3.87”	-
CA8	**Cand.**	2023	2	**CFCP40**	Clear 25mm	25/500	130	370	3000	CC-2V	3.58”	-
CA10	**Cand.**	2006	2	**CFC40**	Clear 32mm	25/500	130	370	3000	CC-2V	4.12”	-
		2007	2	**CFF40**	Frost 32mm	25/500	130	370	3000	CC-2V	4.12”	-
	Med.	2015	2	**EFC40**	Clear 32mm	25/500	130	370	3000	CC-2V	4.12”	-
		2016	2	**EFF40**	Frost 32mm	25/500	130	370	3000	CC-2V	4.12”	-
C11	**Cand.**	100212	2	**C11SG40**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.02”	-
C15	**Med.**	100216	2	**C15SG40**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.49”	-
		100224	X, 2	**C15SG40/AMB**	Amber Spun Glow	25/500	130	-	2000	C-9	4.49”	-
F15	**Med.**	3004	2	**F15CL40**	Clear	25/250	130	300	3000	C-9	4.50”	-
		3006	2	**F15AMB40**	Amber	25/250	130	-	3000	C-9	4.50”	-
G16.5	**Cand.**	4003	2	**G16CL40**	Clear	25/500	130	370	3000	CC-2V	3.00”	-
		4017	2	**G16WH40**	White	25/500	130	320	3000	CC-2V	3.00”	-
G19.5	**Med.**	104504	X, 2	**G19WH40**	White	25/500	130	340	2000	C-9	3.50”	-
G25	**Med.**	5003		**G25CL40**	Clear	10/100	130	300	3500	C-9	4.50”	-
		125003		**G25CL40/120**	Clear	10/100	120	300	3500	C-9	4.50”	-
		102380		**G25CL40/SB**	Clear Silver Bowl Prism®	10/100	130	-	3500	C-9	4.50”	-
		5004		**G25WH40**	White	10/100	130	270	3500	C-9	4.50”	-
		125004	X	**G25WH40/120**	White	10/100	120	280	3500	C-9	4.50”	-
G40	**Med.**	5203		**G40CL40**	Clear	6/24	130	260	5000	C-9	6.93”	-
		5202		**G40WH40**	White	6/24	130	240	5000	C-9	6.93”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.

Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

Decorative

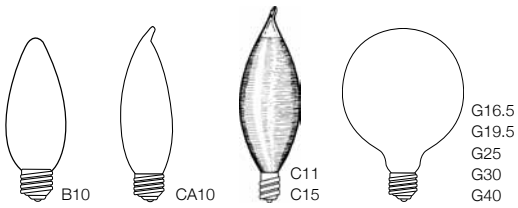

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
60 WATT												
B10	**Cand.**	1009	2	**CTC60**	Clear 32mm	25/500	130	650	3000	CC-2V	3.87”	-
		101284	X,N,2	**CTC60/ND**	Clear Neodymium PureLite®	10/50	120	500	5000	CC-2V	3.87”	-
		1010	2	**CTF60**	Frost 32mm	25/500	130	640	3000	CC-2V	3.87”	-
	E14	121027	X	**CTC60/E14**	Clear 32mm	25/500	120	650	3000	CC-2V	3.87”	-
	Med.	1018	2	**ETC60**	Clear 32mm	25/500	130	650	3000	CC-2V	3.87”	-
		102146	2	**ETC60/CS**	Clear CoverShield®	25/500	130	-	3000	CC-2V	3.87”	-
		1019	2	**ETF60**	Frost 32mm	25/500	130	640	3000	CC-2V	3.87”	-
CA10	**Cand.**	2009	2	**CFC60**	Clear 32mm	25/500	130	650	3000	CC-2V	4.12”	-
		2010	2	**CFF60**	Frost 32mm	25/500	130	640	3000	CC-2V	4.12”	-
	Med.	2018	2	**EFC60**	Clear 32mm	25/500	130	650	3000	CC-2V	4.12”	-
		2019	2	**EFF60**	Frost 32mm	25/500	130	640	3000	CC-2V	4.12”	-
C11	**Cand.**	100213	2	**C11SG60**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.02”	-
		100228	X	**C11SG60/AMB**	Amber Spun Glow	25/500	130	-	2000	CC-2V	4.02”	-
C15	**Med.**	100218	2	**C15SG60**	Clear Spun Glow	25/500	130	-	1500	CC-2V	4.49”	-
		100226	X	**C15SG60/AMB**	Amber Spun Glow	25/500	130	-	2000	C-9	4.49”	-
G16.5	**Cand.**	4004	2	**G16CL60**	Clear	25/500	130	650	3000	CC-2V	3.00”	-
		4018	2	**G16WH60**	White	25/500	130	560	3000	CC-2V	3.00”	-
G19.5	**Med.**	104506	2	**G19WH60**	White	25/500	130	550	1500	C-9	3.50”	-
G25	**Med.**	5005		**G25CL60**	Clear	10/100	130	550	3500	C-9	4.50”	-
		102382		**G25CL60/SB**	Clear Silver Bowl	10/100	130	-	3500	C-9	4.50”	-
		5006		**G25WH60**	White	10/100	130	480	3500	C-9	4.50”	-
G30	**Med.**	5506		**G30WH60**	White	10/100	130	480	5000	C-9	5.00”	-
G40	**Med.**	5205		**G40CL60**	Clear	6/24	130	520	5000	C-9	6.93”	-
		5204		**G40WH60**	White	6/24	130	450	5000	C-9	6.93”	-
100 WATT												
G25	**Med.**	5007		**G25CL100**	Clear	10/100	130	1100	3500	C-9	4.50”	-
G40	**Med.**	5207		**G40CL100**	Clear	6/24	130	1100	5000	C-9	6.93”	-
		5206		**G40WH100**	White	6/24	130	950	5000	C-9	6.93”	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.

INCANDESCENT LAMPS

Bulb, Base and Filament Identification Guide

Bulb Shapes

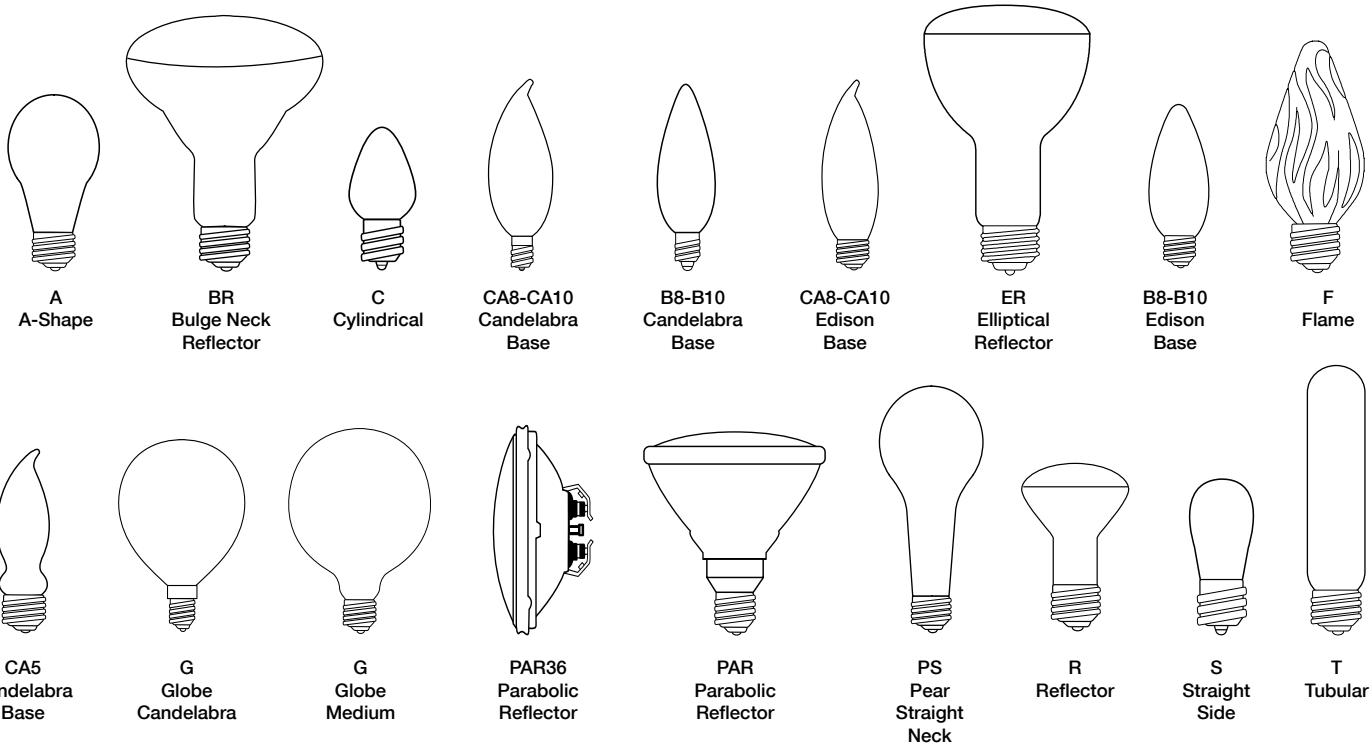

A
A-Shape

BR
Bulge Neck
Reflector

C
Cylindrical

CA8-CA10
Candelabra
Base

B8-B10
Candelabra
Base

CA8-CA10
Edison
Base

ER
Elliptical
Reflector

B8-B10
Edison
Base

F
Flame

CA5
Candelabra
Base

G
Globe
Candelabra

G
Globe
Medium

PAR36
Parabolic
Reflector

PAR
Parabolic
Reflector

PS
Pear
Straight
Neck

R
Reflector

S
Straight
Side

T
Tubular

Base Types

Screw
Terminals



DC
Bayonet
BA15d



Candelabra
E12



E14



Intermediate
E17



Medium
E26



Medium
Side Prong



Mog.
E39



Mog. End
Prong

Filament Designations

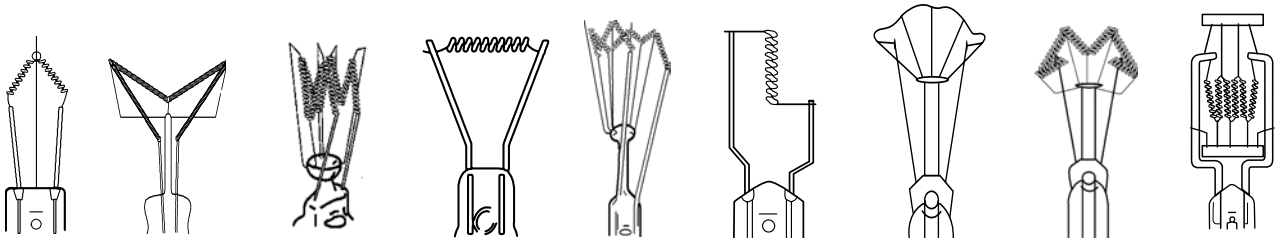

CC-2V

C3-A

C-5

CC-6

C-7A

CC-8

CC-9

C-9M

CC-13

CC indicates coiled-coil filament.

INCANDESCENT LAMPS

Symbols, Footnotes and Abbreviations

SYMBOLS

†	New product introduced within the past year.
Al	Aluminum base.
N	Nickel-plated brass base.
△	Heat-resistant glass.
$	Energy saving product.
Ⓔ	This lamp meets Federal Minimum Efficiency standards.
X	Product will be discontinued when inventory is depleted.
L	Legislated lamp will not be manufactured after January 1, 2014.

FOOTNOTES

1	Operate base down.
2	Operate base down to horizontal.
3	Operate base up.
4	This lamp should be shielded from moisture to prevent breakage.
5	May not give satisfactory performance if accessory equipment is attached to or touches bulb.
6	Do not allow hot bulb to come in contact with liquid or metal parts of the fixture, as glass may shatter. Do not use outdoors or operate near flammable materials. Operate in heat-resistant sockets.
7	Do not use in equipment where base temperature will exceed 500°F.
8	Use only in equipment specially designed to maintain bulb and base temperatures within safe limits.
9	May be used for indoor and outdoor applications.
10	Use only in circuits supplying the voltage indicated on the lamp. Not for use in household sockets.
11	CAUTION: Do not operate near flammable material. Operate only in heat-resistant sockets. WARNING: Use with care. May cause serious burns. The unattended use of infrared heat by children or incapacitated persons is dangerous. Do not place closer than 18" to surface area. Do not use for therapeutic applications unless recommended by a physician. For food warming, use only lamps with heat-resistant glass and/or heat-resistant coating.
12	Although this bulb is made of heat-resistant glass, it may break if moisture falls on it. Not recommended for use in enclosed and/or close-fitting housing.
13	Use only with heat-resistant connector and with lamp supported by bulb rim.
14	Operate only in porcelain sockets.
15	Unsatisfactory operation if operated in positions between horizontal and base up, particularly between 45° from base up and base down.
16	Do not operate in aviaries or around fowl or small animals.
17	See Halogen footnotes 1, 2 and 7 on page 131.
18	See Halogen footnotes 1, 7 and 8 on page 131.
19	See Halogen footnotes 1 and 7 on page 131.

INCANDESCENT LAMPS

Symbols, Footnotes and Abbreviations

ABBREVIATIONS

/1	Suffix used to indicate a Clear Faceted Infrared lamp.
3W	Code abbreviation for Three Way lamps.
/5	Suffix used to indicate 5,000 hour lamps.
/10	Suffix used to indicate Red-Faced Heat lamps.
/12V	Suffix used to indicate 12 Volt lamps.
/20	Suffix used to indicate Prism® UltraLife® 20,000 hour lamps.
/39	Suffix used to indicate 39 Watt HaloXen® PAR lamps.
/120	Suffix used to indicate 120 Volt lamps.
/130	Suffix used to indicate 130 Volt HaloXen® PAR lamps.
/145V	Suffix used to indicate 145 Volt lamps.
/1750	Suffix used to indicate lamps that produce 1750 lumens.
/CAN	Suffix used to indicate lamps with Candelabra (E12) base.
/E12	Suffix used to indicate lamps with an E12 (candleabra) base.
/E14	Suffix used to indicate lamps with an E14 base.
/E17	Suffix used to indicate lamps with an E17 (intermediate) base.
/E26	Suffix used to indicate lamps with an E26 (medium) base.
AMB	Code abbreviation for lamps with an Amber finish.
BG	Code abbreviation for Bug Light lamps.
BLU	Code abbreviation for lamps with a Blue finish.
C	Code abbreviation for lamps with a Ceramic color finish.
CL	Code abbreviation for lamps with a Clear finish.
/CS	Suffix used to indicate CoverShield® safety coated lamps.
/CSTF	Suffix used to indicate CoverShield® PFA safety coated lamps.
DC	Code abbreviation for lamps with a Double Contact Bayonet base (BA15d).
DPNK	Code abbreviation for lamps with a Dawn Pink finish.
FL	Code abbreviation for Flood lamps.
FR	Code abbreviation for lamps with a Frost finish.
GRN	Code abbreviation for lamps with a Green finish.
GRO	Code abbreviation for Plant Grow lamps.
/HG	Suffix used to indicate Hard Glass lamps.
HP	Code abbreviation for Halogen PAR lamps.

ABBREVIATIONS

/HX	Suffix used to indicate HaloXen® lamps.
INT	Code abbreviation for lamps with an Intermediate (E17) base.
L	Code abbreviation for Long Neck Halogen PAR30 lamps.
/M	Suffix used to indicate Major brand lamps (GE, Philips, Osram/Sylvania).
MED	Code abbreviation for lamps with a Medium (E26/27) base.
MFL	Code abbreviation for Medium Flood lamps.
N	Code abbreviation for High-Intensity lamps.
/ND	Suffix used to indicate PureLite® Natural Daylight lamps.
NFL	Code abbreviation for Narrow Flood lamps.
/NL	Suffix used to indicate Night Light.
NSP	Code abbreviation for Narrow Spot lamps.
ORG	Code abbreviation for lamps with an Orange finish.
/P5	Suffix used to indicate Prism® Long Life Plus® 5,000 Hour staggered support C-9M filament lamps.
/P10	Suffix used to indicate Prism® Ultra Life® 10,000 Hour staggered support C-9M filament lamps.
PNK	Code abbreviation for lamps with a Pink finish.
PUR	Code abbreviation for lamps with a Purple finish.
Q	Code abbreviation for Quartz Halogen lamps.
RED	Code abbreviation for lamps with a Red finish.
RS	Code abbreviation for Rough Service lamps.
/S	Code abbreviation for HaloXen® Silver PAR lamps.
/SB	Suffix used to indicate Silver Bowl.
SG	Code abbreviation for Spun Glow decorative lamps.
SP	Code abbreviation for Spot lamps.
SW	Code abbreviation for lamps with a Soft White finish.
/T	Suffix used for colored Incandescent lamps with a Transparent finish.
VNSP	Code abbreviation for Very Narrow Spot lamps.
VWFL	Code abbreviation for Very Wide Flood lamps.
WFL	Code abbreviation for Wide Flood lamps.
WH	Code abbreviation for lamps with a White finish.
XIR	Suffix used to indicate Halogen Infrared lamps.
YEL	Code abbreviation for lamps with a Yellow finish.