



# IESNA LM79-2008 Test Report

TÜV SÜD America

## Photometric Testing and Evaluation in Accordance with LM79-2008

Report Prepared for:

**David Delgado**  
Applications Engineer

**Maxlite Inc.**  
12 York Ave.  
West Caldwell, NJ 07006  
United States

Telephone: (800) 555-5629

**Sample Tested:** SKG0903LED27  
**Sample Description:** 3W G9 2700K  
**Manufacturer:** Maxlite, Inc.

**Technical Report Number:** Ji1407403-18-LM79  
**Report Issue Date:** July 30<sup>th</sup>, 2014  
**Total Number of Pages:** 8 (including this page)

**Report Prepared by:**

**Byrd Evans**  
TÜV SÜD Project Handler

**Report Reviewed by:**

**Bryan Cubitt**  
TÜV SÜD Program Manager

**TÜV SÜD America, Inc.**

5945 Cabot Parkway, Suite 100,  
Alpharetta GA 30005

Telephone: 678-341-5900 [www.tuvamerica.com](http://www.tuvamerica.com)

Page 1

NRG\_F\_10.04

*Confidential Report*



Lab Code: 500065-0

TÜV SÜD America is  
accredited under the  
NVLAP EEL program.



# IESNA LM79-2008 TEST REPORT

July 30, 2014

## Summary of Key Test Results


Model# **SKG0903LED27**

Manufacturer **Maxlite, Inc.**

TÜV Sample# 1417-18

Date of Test June 22<sup>nd</sup>, 2014

Notes: Tested in below orientation  
(LBU – Lamp Base Up)

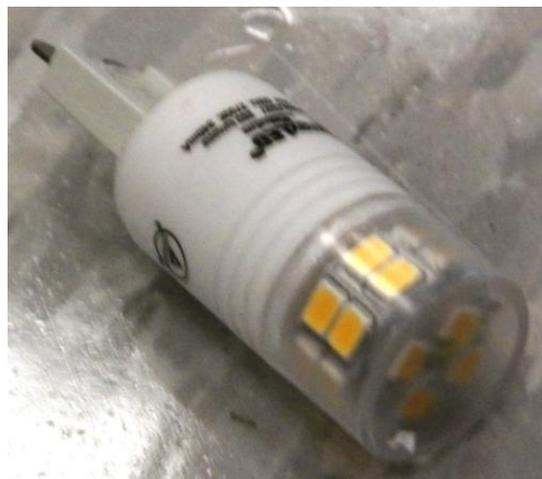

<b>Parameter</b>	<b>Measured Result</b>
Luminous Flux	<b>273.4 Lumens</b>
Input Power	<b>2.66 Watts</b>
Efficacy	<b>102.98 Lumens/Watt</b>
C.C.T.	<b>2926 K</b>
C.R.I. (R <sub>a</sub> )	<b>83.4</b>
Beam Spread	<b>N/A - Omnidirectional</b>
Stabilization Time	<b>45 minutes</b>

The above results are recorded / derived from measurements in accordance with LM79-08.



# IESNA LM79-2008 TEST REPORT

July 30, 2014

## TABLE OF CONTENTS

Test Results .....4

Spectral Flux and Chromaticity Diagram .....5

Zonal Lumen Summary .....5

Illuminance Plots.....6

Candela Plots .....6

Photometric Testing Information .....7

Equipment List: .....8



# IESNA LM79-2008 TEST REPORT

July 30, 2014

### Test Results –

The following results were obtained after stabilization of the sample in accordance with the requirements set forth in section 5.0 of IES LM79-2008. Stability is achieved when the variation of 3 readings of light output and electrical power over a period of 30 minutes, taken 15 minutes apart, is less than 0.5%.

Photometric Results	Maxlite- SKG0903LED27	
	Integrating Sphere	
Total Luminous Flux (Lumens)	273.4	
Luminous Efficacy (Lumens/Watt)	102.98	
Total Radiant Flux (Watts)	0.9	
Correlated Color Temperature (CCT)	2926	
Color Rendering Index (CRI – R <sub>a</sub> )	83.4	
R <sub>9</sub> Value	20.5	
Chromaticity (Chroma x / Chroma y)	0.4400 / 0.4016	
Chromaticity (Chroma u / Chroma v)	0.2537 / 0.3472	
Chromaticity (Chroma u' / Chroma v')	0.2537 / 0.5209	
D <sub>uv</sub> Value	-0.00139	

Electrical Results (120V AC Input)	Maxlite- SKG0903LED27	
	Integrating Sphere	
Input Power (Watts)	2.66	
Input Voltage (Volts AC)	120.08	
Input Current (Amps AC)	0.037	
Power Factor	0.595	
Input Frequency (Hertz)	60.0	
A-THD (Current %)	54.99%	

Additional Parameters	Maxlite- SKG0903LED27	
	Integrating Sphere	Goniophotometer
Stabilization Time (Light and Power)	45 minutes	46 minutes
Test Geometry Configuration	4π	Type C
Ambient Temperature	24.1°C	25.5°C
Spacing Criteria	N/A	



# IESNA LM79-2008 TEST REPORT


Report# Ji1407403-18-LM79

July 30, 2014

## Spectral Flux and Chromaticity Diagram

### Spectral Flux

▼ SPECTRAL FLUX GRAPH:

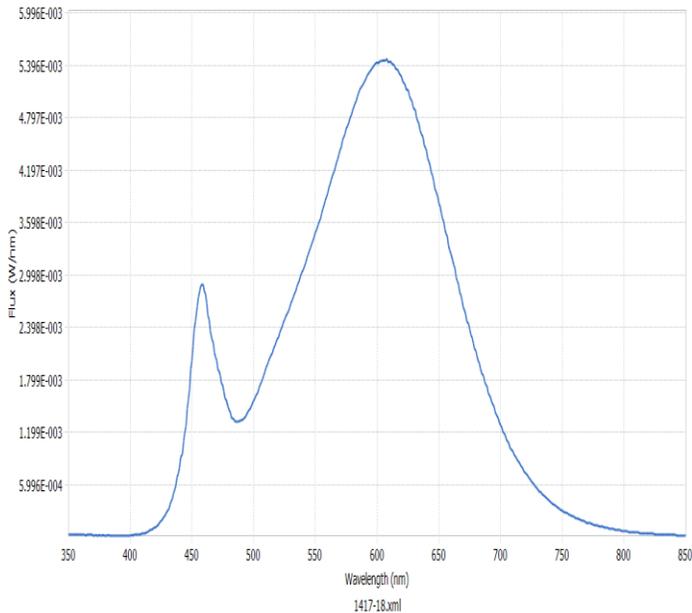


Spectral response of the Radiant Flux

(350nm to 850nm)

### Chromaticity Diagram

▼ CHROMATICITY DIAGRAM:

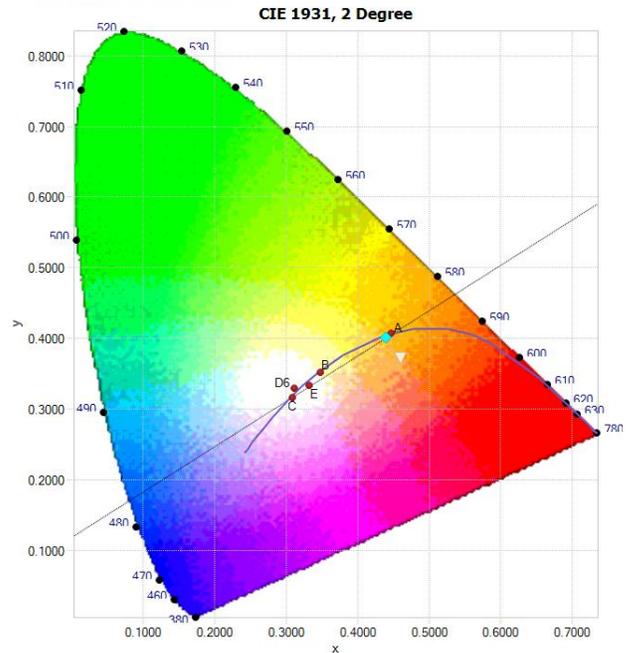

Tristimulus values (from page 4):

$$x / y = 0.4400 / 0.4016$$

The locations on the diagram of the tristimulus coordinates are indicated by the blue diamond.

## Zonal Lumen Summary

Zone	Lumens	% Lamp / Luminaire
0 - 60	89.2	31.6 %
60 - 90	85.7	30.3 %
0 - 90	174.9	61.9 %
90 - 180	107.5	38.1 %
0 - 180	282.5	100 %

TUV SUD America, Inc.  
5945 Cabot Parkway, Suite 100,  
Alpharetta GA 30005

Telephone: 678-341-5900 www.tuvamerica.com

Page 5

NRG\_F\_10.04

Confidential Report



Lab Code: 500065-0

TUV SUD America is accredited under the NVLAP EEL program.





# IESNA LM79-2008 TEST REPORT

July 30, 2014

## Test Results – Illuminance Plots

The following images depict the illuminance characteristics of the luminaire.

Illuminance at a Distance	
Center Beam FC	Beam Width
1.7ft	<b>7.86 fc</b>
3.3ft	<b>1.96 fc</b>
5.0ft	<b>0.87 fc</b>
6.7ft	<b>0.49 fc</b>
8.3ft	<b>0.31 fc</b>
10.0ft	<b>0.22 fc</b>


Illuminance at a Distance	
Center Beam FC	Field Width
1.7ft	<b>7.86 fc</b>
3.3ft	<b>1.96 fc</b>
5.0ft	<b>0.87 fc</b>
6.7ft	<b>0.49 fc</b>
8.3ft	<b>0.31 fc</b>
10.0ft	<b>0.22 fc</b>

Beam Angle = N/A


Field Angle = N/A

## Test Results – Candela Plots


The following images depict the luminous intensity distribution characteristics of the luminaire:

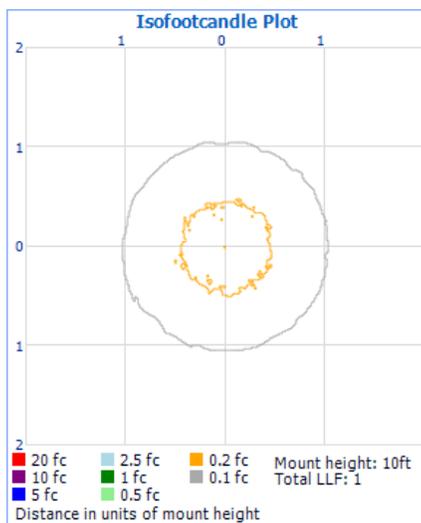

Isofootcandle Plot

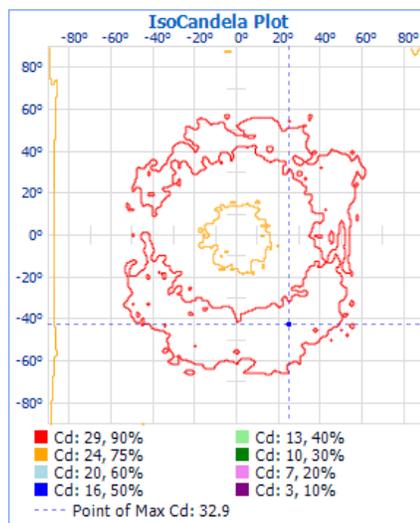

Isocandela Plot

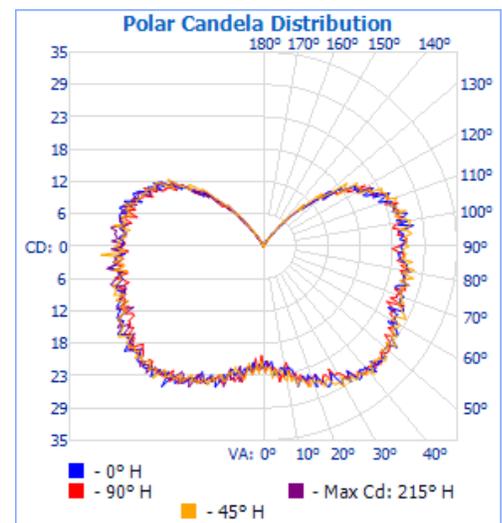

Polar Candela

Maximum Candela = **32.9** at Horizontal: 215.0°, Vertical: 48.0°



# IESNA LM79-2008 TEST REPORT

July 30, 2014

## TÜV SÜD Photometric Testing Information

Testing is performed in accordance with the procedures outlined in IESNA LM79-2008. The sample is evaluated for photometric and electrical characteristics using an integrating sphere and a goniophotometer, located in an accredited, temperature and humidity-controlled, draft free photometric laboratory.

### ***Sphere Geometry***

The integrating spheres used for measurement utilize a “ $4\pi$  geometry” configuration in accordance with section 9 of IES LM-79-2008 and is applicable for all types of SSL products (directional and non-directional light projections). The spectroradiometer is an array-type detector manufactured and calibrated by Labsphere (Model# CDS1100).

### ***Self-Absorption Correction***

The integrating sphere uses self-absorption correction to eliminate errors due to mismatches between the standard reference lamp and the test samples being measured. This auxiliary correction lamp is a halogen type lamp powered by a calibrated Lamp Power Supply manufactured and calibrated by Labsphere (model LPS150). Ambient temperature is measured using a thermocouple located inside the integrating sphere at the same height as the sample under test (UUT) and not more than 1 meter in horizontal distance away from the sample (section 2.2 of LM79-2008). The thermocouple is located behind a baffle in order to eliminate any direct optical radiation from the sample under test.

### ***Sample Stabilization***

The sample (UUT) is placed inside the integrating sphere and powered by a regulated and conditioned alternating or direct current supply. The stabilization times shown on the results pages of this report denote the time of the 3<sup>rd</sup> measurement (of the 3 consecutive readings) since this is the minimum time that the sample is assumed to have taken to reach stabilization in accordance with section 5.0 of LM79-2008.

### ***Sphere Calibration***

The integrating sphere is calibrated using a quartzline halogen lamp with the following specifications:

Manufacturer: EYE Lighting International

Model# J94/JD28V75W

Voltage = 28.0 Volts DC

Wattage = 75.0 Watts

Calibration Current = 2.679 Amperes

Luminous Flux = 1685 Lumens

Calibration Date = 2-17-2011 (calibrated by Labsphere – NIST traceable).

Continued.....

**TÜV SÜD America, Inc.**

5945 Cabot Parkway, Suite 100,  
Alpharetta GA 30005

Telephone: 678-341-5900 [www.tuvamerica.com](http://www.tuvamerica.com)

Page 7

NRG\_F\_10.04

**Confidential Report**



Lab Code: 500065-0

TÜV SÜD America is  
accredited under the  
NVLAP EEL program.



# IESNA LM79-2008 TEST REPORT

Report# Ji1407403-18-LM79

July 30, 2014

## TÜV SÜD Photometric Testing Information (continued)

### Goniophotometer

The Goniophotometer is a Mirror based Type C optical measurement system in accordance with section 9.3.1 of IESNA LM79-2008.

### Goniophotometer Calibration

The Goniophotometer is calibrated using a frosted tungsten filament FDS/DZE lamp with the following specifications:

- Manufacturer: General Electric
- Part Number: CSB-110
- Lamp Number: 112-A
- Voltage: 16.52 Volts DC
- Wattage: 150.0 Watts
- Calibration Current: 4.816 Amperes
- Luminous Intensity: 151.5 Candelas
- Calibration Date: 02-13-2011 (NIST traceable)

## TÜV SÜD Test Equipment List:

TÜV SÜD Sphere System – contains the following:			
Description	Manufacturer / Model#	TÜV SÜD Ref#	Calibration Due Date
Integrating Sphere	Labsphere LM760	SPH003	weekly
Spectroradiometer	Labsphere CDS1100	ATLE0049	9/7/2014
Power Analyzer	Yokogawa WT210	ATLE0031	11/12/2014
Power Source	Chroma 61602	AC003	N/A
Thermometer	Fluke 52-II	ATLE0118	1/16/2015
TÜV SÜD Mirror Goniophotometer System – contains the following:			
Goniophotometer	M.E. GONC02	GON002	Weekly
Spectroradiometer	Gigahertz Optik P9801	GIG002	Weekly
Power Analyzer	Yokogawa WT210	ATLE0031	11/21/2014
Power Source	Chroma 61603	AC007	N/A

*This technical report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.*

*This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government*

**TÜV SÜD America, Inc.**  
 5945 Cabot Parkway, Suite 100,  
 Alpharetta GA 30005  
 Telephone: 678-341-5900 www.tuvamerica.com

Page 8

NRG\_F\_10.04

**Confidential Report**



TÜV SÜD America is accredited under the NVLAP EEL program.

