



IESNA LM79-2008 Test Report

TÜV SÜD America

Photometric Testing and Evaluation in Accordance with LM79-2008

Report Prepared for:

David Delgado
Applications Engineer

Maxlite Inc.
12 York Ave.
West Caldwell, NJ 07006
United States

Telephone: (800) 555-5629

Sample Tested: SKG15DLED30
Sample Description: 15W LED G40 3000K DIMMABLE
Manufacturer: Maxlite, Inc.

Technical Report Number: 72112668-01-LM79
Report Issue Date: January 8th 2016
Total Number of Pages: 8 (including this page)

Report Prepared by:

Pete Faria

TÜV SÜD Project Handler

Report Reviewed by:

Bryan Cubitt

TÜV SÜD Operations Manager

Summary of Key Test Results

Model# **SKG15DLED30**
 Manufacturer **Maxlite, Inc.**
 TÜV Sample# **2181-1**
 Date of Test **January 5th 2016**



Notes:

Tested in Lamp Base Up orientation

Parameter	Measured Result
Luminous Flux	1,341 Lumens
Input Power	15.08 Watts
Efficacy	88.90 Lumens/Watt
C.C.T.	2976 K
C.R.I. (R _a)	82.4
Beam Angle	N/A (omnidirectional lamp)
Stabilization Time	60 minutes

The above results are recorded / derived from measurements in accordance with LM79-08



IESNA LM79-2008 TEST REPORT

Report# 72112668-01-LM79

January 08, 2016

TABLE OF CONTENTS

Test Results 4

Spectral Flux and Chromaticity Diagram 5

Zonal Lumen Summary 5

Illuminance Plots 6

Candela Plots 6

Photometric Testing Information 7

Equipment List: 8





IESNA LM79-2008 TEST REPORT

January 08, 2016

Test Results

The following results were obtained after stabilization of the sample in accordance with the requirements set forth in section 5.0 of IES LM79-2008. Stability is achieved when the variation of 3 readings of light output and electrical power over a period of 30 minutes, taken 15 minutes apart, is less than 0.5%.

Photometric Results	SKG15DLED30	
	Integrating Sphere	
Luminous Flux (Lumens)	1,341	
Efficacy (Lumens/Watt)	88.90	
Color Temperature (CCT K)	2976	
Color Rendering Index (CRI)	82.4	
R ₉ Value	12.0	
Radiant Flux (W/nm)	4.21	
Chroma x / Chroma y	0.4376	0.4029
Chroma u / Chroma v	0.2515	0.3473
Chroma u' / Chroma v'	0.2515	0.5210
Duv	-0.00057	

Electrical Results	SKG15DLED30	
	Integrating Sphere	
Input Power (Watts)	15.08	
Input Voltage (Volts)	119.99	
Input Current (Amps)	0.129	
Power Factor	0.971	
THD-A%	16.83	
Input Frequency (Hz)	60.0	

Additional Parameters	SKG15DLED30	
	Integrating Sphere	Goniophotometer
Stabilization Time (Light and Power)	60 minutes	70 minutes
Test Geometry Configuration	4π	Type C
Spectroradiometer	Labsphere CDS1100	Gigahertz Optik P9801
Ambient Temperature	24.1°C	24.9°C






IESNA LM79-2008 TEST REPORT

Report# 72112668-01-LM79

January 08, 2016


Spectral Flux and Chromaticity Diagram

Spectral Flux

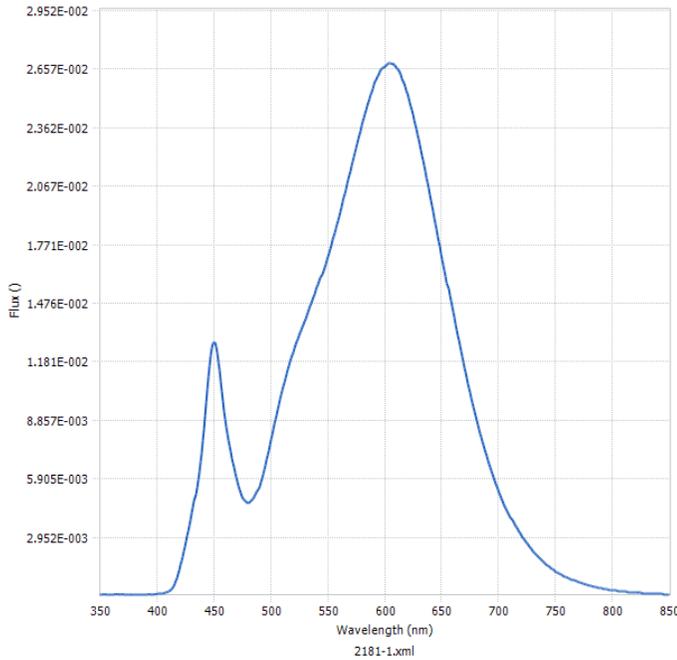

**Spectral response of the Radiant Flux
(350nm to 850nm)**

Chromaticity Diagram

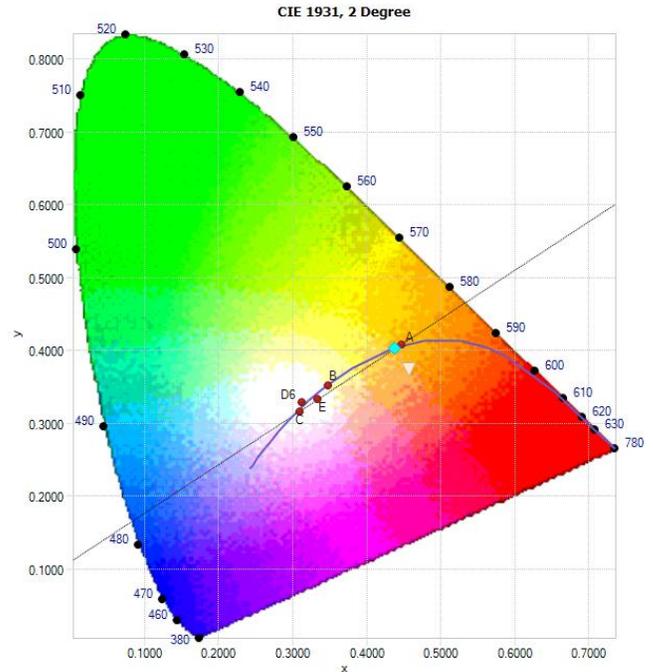

Tristimulus values (from page 4):

$x / y = 0.4376 / 0.4029$

The locations on the diagram of the CCT coordinates are indicated by the blue diamond.

Zonal Lumen Summary

Zone	Lumens	% Lamp
0 - 60	481.4	36.7%
60 - 90	399.3	30.4%
0 - 90	880.6	67.1%
90 - 180	431.0	32.9%
0 - 180	1,311.6	100.0%





IESNA LM79-2008 TEST REPORT

Report# 72112668-01-LM79

January 08, 2016

Test Results – Illuminance Plots


The following images depict the illuminance characteristics of the luminaire.

N/A
Omnidirectional lamp


N/A
Omnidirectional lamp

Test Results – Candela Plots


The following images depict the luminous intensity distribution characteristics of the luminaire:

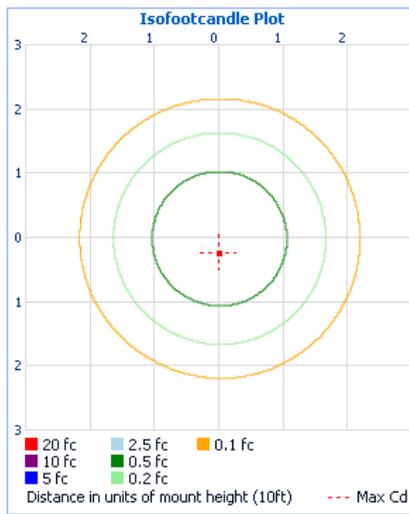

Isofootcandle Plot

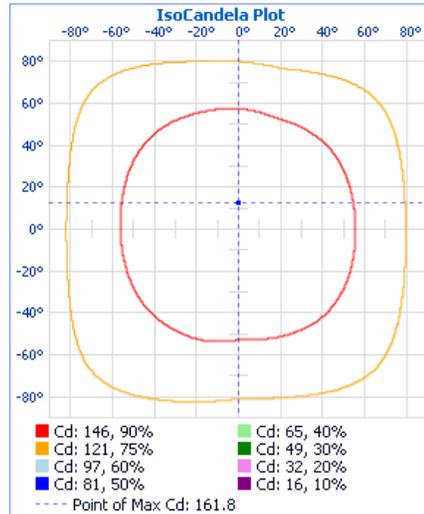

Isocandela Plot

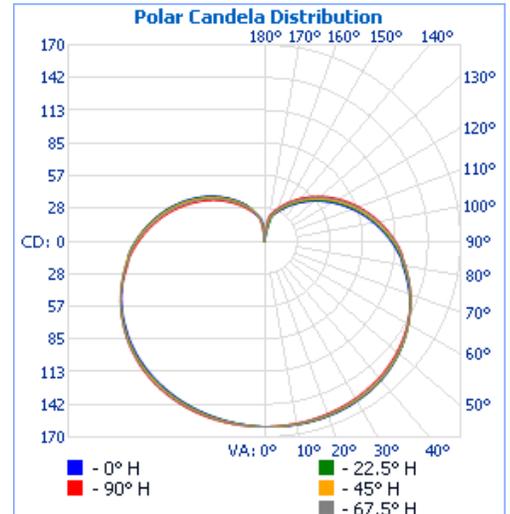

Polar Candela

Maximum Candela = **161.8** at Horizontal: 157.5°, Vertical: 2.5°

TUV SÜD America, Inc.
5945 Cabot Parkway, Suite 100,
Alpharetta GA 30005

Telephone: 678-341-5900 www.tuvamerica.com

Page 6

NRG_F_10.04

Confidential Report



TUV SÜD America is
accredited under the
ISO/IEC 17025:2005
program

NRG_F_10.04, Rev. 2, Effective: 2015-07-13





IESNA LM79-2008 TEST REPORT

January 08, 2016

TÜV SÜD Photometric Testing Information

Testing is performed in accordance with the procedures outlined in IESNA LM79-2008. The sample is evaluated for photometric and electrical characteristics using an integrating sphere and a goniophotometer, located in an accredited, temperature and humidity-controlled, draft free photometric laboratory.

Sphere Geometry

The integrating spheres used for measurement utilize a “ 4π geometry” configuration in accordance with section 9 of IES LM-79-2008 and is applicable for all types of SSL products (directional and non-directional light projections). The spectroradiometer is an array-type detector manufactured and calibrated by Labsphere (Model# CDS1100).

Self-Absorption Correction

The integrating sphere uses self-absorption correction to eliminate errors due to mismatches between the standard reference lamp and the test samples being measured. This auxiliary correction lamp is a halogen type lamp powered by a calibrated Lamp Power Supply manufactured and calibrated by Labsphere (model LPS150). Ambient temperature is measured using a thermocouple located inside the integrating sphere at the same height as the sample under test (UUT) and not more than 1 meter in horizontal distance away from the sample (section 2.2 of LM79-2008). The thermocouple is located behind a baffle in order to eliminate any direct optical radiation from the sample under test.

Sample Stabilization

The sample (UUT) is placed inside the integrating sphere and powered by a regulated and conditioned alternating or direct current supply. The stabilization times shown on the results pages of this report denote the time of the 3rd measurement (of the 3 consecutive readings) since this is the minimum time that the sample is assumed to have taken to reach stabilization in accordance with section 5.0 of LM79-2008.

Sphere Calibration

The integrating sphere is calibrated using a quartzline halogen lamp with the following specifications:

Manufacturer: EYE Lighting International

Model# J94/JD28V75W

Voltage = 28.0 Volts DC

Wattage = 75.0 Watts

Calibration Current = 2.679 Amperes

Luminous Flux = 1685 Lumens

Calibration Date = 2-17-2011 (calibrated by Labsphere – NIST traceable).

Continued.....

TÜV SÜD America, Inc.

5945 Cabot Parkway, Suite 100,
Alpharetta GA 30005

Telephone: 678-341-5900 www.tuvamerica.com

Page 7

NRG_F_10.04

Confidential Report



TÜV SÜD America is
accredited under the
ISO/IEC 17025:2005
program



IESNA LM79-2008 TEST REPORT

January 08, 2016

TÜV SÜD Photometric Testing Information (continued)

Goniophotometer

The Goniophotometer is a Type C optical measurement system in accordance with section 9.3.1 of IESNA LM79-2008.

Goniophotometer Calibration

The Goniophotometer is calibrated using a frosted tungsten filament FDS/DZE lamp with the following specifications:

- Manufacturer: General Electric
- Part Number: CSB-110
- Lamp Number: 105-A
- Voltage: 16.71 Volts DC
- Wattage: 150.0 Watts
- Calibration Current: 4.847 Amperes
- Luminous Intensity: 166.3 Candelas
- Calibration Date: 11-07-2011 (NIST traceable)

TÜV SÜD Test Equipment List:

TÜV SÜD Sphere System – contains the following:			
Description	Manufacturer / Model#	TÜV SÜD Ref#	Calibration Due Date
Integrating Sphere	Labsphere LM760	SPH003	weekly
Power Analyzer	Yokogawa WT210	ATLE0076	6/19/2016
Power Source	Chroma 61602	AC003	N/A
Thermometer	Fluke 52-II	ATLE0119	2/27/2016
TÜV SÜD Goniophotometer System – contains the following:			
Goniophotometer	M.E. GONC01	GON001	weekly
Spectroradiometer	Gigahertz Optik P9801	GIG001	weekly
Power Analyzer	Yokogawa WT210	ATLE0059	3/26/2016
Power Source	Chroma 61602	AC006	N/A

This technical report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government

TÜV SÜD America, Inc.
 5945 Cabot Parkway, Suite 100,
 Alpharetta GA 30005
 Telephone: 678-341-5900 www.tuvamerica.com

Page 8
 NRG_F_10.04
Confidential Report



TÜV SÜD America is
 accredited under the
 ISO/IEC 17025:2005
 program

