



Architectural MSD

MSD 700.1CT/3

The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Product data


General Information	
Base	G22 [G22]
Operating Position	Universal [Universal]
Main Application	Studio/Disco
Life to 50% Failures (Nom)	3000 h
System Description	na [-]
Light Technical	
Color Code	- [Not Specified]
Initial lumen (Min)	46000 lm
Initial lumen (Nom)	50500 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	72 lm/W
Color Rendering Index (Nom)	75
Operating and Electrical	
Power (Rated) (Nom)	700 W
Lamp Current (Nom)	11 A
Ignition Supply Voltage (Min)	207 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	na [-]
Luminaire Design Requirements	
Bulb Temperature (Max)	600 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	MSD 700.1CT/3
EAN/UPC - Product	8727900911299
Order code	245530
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material Nr. (12NC)	928170405114
Net Weight (Piece)	0.147 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Dimensional drawing




MSD 700

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD	40 mm	10.0	84 mm	86 mm	85	175 mm	54 mm	53	52 mm
700.1CT/3		mm			mm			mm	

Photometric data

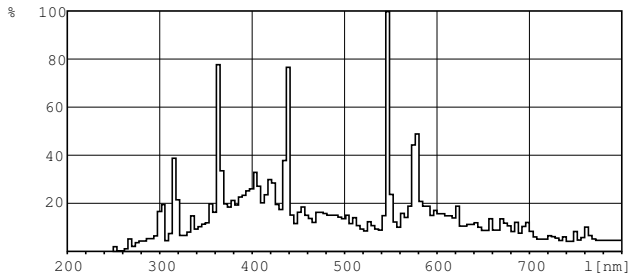

MSD

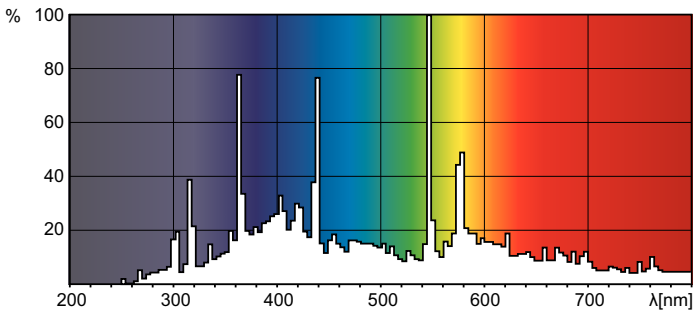

MSD

