



MSR Hot Restrike

MSR2500 HR 1CT/2

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data


General Information	
Base	G38 [G38]
Operating Position	Universal [Universal]
Main Application	Indoor & Outdoor filming
Life to 50% Failures (Nom)	500 h
System Description	Hot Restrike
Light Technical	
Color Code	- [Not Specified]
Initial lumen (Min)	207900 lm
Initial lumen (Nom)	231000 lm
Chromaticity Coordinate X (Nom)	325
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	83 lm/W
Luminous Efficacy (rated) (Nom)	92 lm/W
Color Rendering Index (Nom)	95
Operating and Electrical	
Power (Rated) (Nom)	2500 W
Lamp Current (Nom)	24.4 A

Ignition Supply Voltage (Min)	207 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	na [-]
Luminaire Design Requirements	
Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	450 °C
Product Data	
Order product name	MSR 2500 HR 1CT/2
EAN/UPC - Product	8727900926040
Order code	245811
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	928104905114
Net Weight (Piece)	0.305 kg

MSR Hot Restrike

Warnings and Safety

Dimensional drawing





MSR 2500 HR

Product

MSR 2500 HR 1CT/2

Photometric data

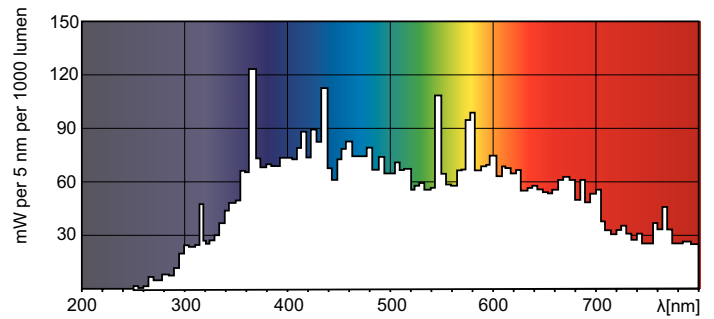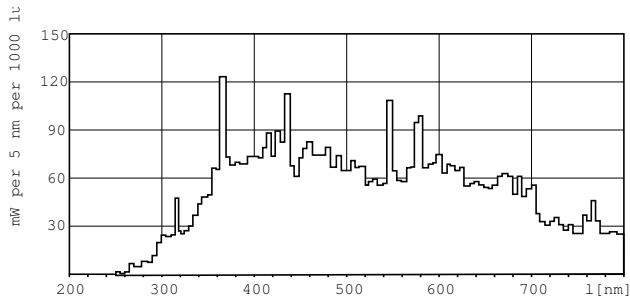

XDPO_XDMSR_HR_--Spectral power distribution Colour

