












**MR11**

- Only for Use in Approved Halogen Fixtures
- 35mm, Dichroic Coating, Faceted Mirror Reflector
- Miniature 2-Pin Base - GZ4
- 12 & 24 Volts
- Universal Burn Position
- Available with Front Glass Cover (FG)



Watts (W)	Ordering Code	Lamp Description	MOL (mm)	Color Temp (K)	Angle	Beam Spread	Max CP (cd)	Ave Life (h)	Case Qty
<b>Miniature 2-Pin Base – GZ4</b>									
12	1000615	FTA, JDR/M12V-12W/G/NSP9.5	35.0	2925	9.5°	Narrow Spot	2300	2000	10
12	1000616	FTA/FG, JDR/M12V-12W/G/NSP9.5/FG	35.0	2925	9.5°	Narrow Spot	2300	2000	10
20	1000617	FTB, JDR/M12V-20W/G/SP10	35.0	2925	10°	Spot	3000	2000	10
20	1000618	FTB/FG, JDR/M12V-20W/G/SP10/FG	40.9	2925	10°	Spot	3000	2000	10
20	1000619	FTC, JDR/M12V-20W/G/SP17	35.0	2925	17°	Spot	1400	2000	10
20	1000620	FTC/FG, JDR/M12V-20W/G/SP17/FG	35.0	2925	17°	Spot	1400	2000	10
20	1000621	FTD, JDR/M12V-20W/G/FL30	35.0	2925	30°	Flood	600	2000	10
20	1000622	FTD/FG, JDR/M12V-20W/G/FL30/FG	40.9	2925	30°	Flood	600	2000	10
35	1000625	FTF, JDR/M12V-35W/G/SP20	35.0	2950	20°	Spot	2400	2000	10
35	1000627	FTH, JDR/M12V-35W/G/FL30	35.0	2950	30°	Flood	1300	2000	10
35	1000628	FTH/FG, JDR/M12V-35W/G/FL30/FG	40.9	2950	30°	Flood	1300	2000	10
<b>24 Volt, Miniature 2-Pin Base – GZ4</b>									
20	1001000	JDR/M24V-20W/SP19/FG	40.9	2925	19°	Spot	1150	2000	10
20	1001004	JDR/M24V-20W/FL30/FG	35.0	2925	30°	Flood	500	2000	10
35	1001007	JDR/M24V-35W/SP13	35.0	2925	13°	Spot	2100	2000	10
35	1001010	JDR/M24V-35W/FL30/FG	35.0	2950	30°	Flood	850	2000	10

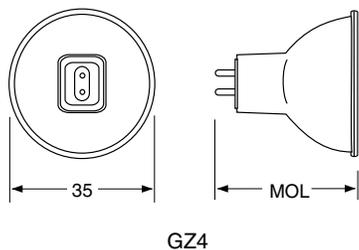

# TUNGSTEN HALOGEN LAMPS • MR11 REFLECTOR

## MR11

- Only for Use in Approved Enclosed Halogen Fixtures
- Miniature 2-Pin Base - GZ4, 2-Pin Base - G4.8/5.3 & Double Contact Bayonet Base - BA15d
- Low Voltage
- Universal Burn Position
- Faceted (except as noted)



Watts (W)	Ordering Code	Lamp Description	MOL (mm)	Reflector Type	Filament Type	Color Temp (K)	Beam		Max CP (cd)	Ave Life (h)	Case Qty
							Angle	Spread			
<b>Miniature 2-Pin Base – GZ4</b>											
10	1000931	JCR/M6V-10WN/FG	40.8	Faceted	C-6	3050	8.5°	Narrow Spot	3000	200	100
15	1000932	JCR/M6V-15W/FG/XX MR11	35.0	Faceted	C-6	3050	17°	Spot	3900	500	100
20	1000934	JCR/M6V-20W	33.3	Faceted	C-6	3200	20°	Spot	1800	50	10
35	1000930	JCR/M14V-35W	36.0	Specular	C-8	—	—	—	—	50	10
50	1000926	JCR/M12V-50W	35.0	Specular	C-8	—	—	—	—	50	10
<b>2-Pin Base – G4.8/5.3</b>											
75	1000929	JCR/M12V-75W/HO	37.0	Specular	C-8	—	—	—	—	50	10
100	1000921	JCR/M12V-100W	37.0	Specular	C-8	3400	—	—	—	25	10
<b>Double Contact Bayonet Base – BA15d</b>											
20	1000609	FST, JDR/M12V-20W/BA/SP17	44.0	Faceted	C-6	2900	17°	Spot	1400	2000	10
20	1000610	FST/FG, JDR/M12V-20W/BA/SP17/FG	46.5	Faceted	C-6	2900	17°	Spot	1400	2000	10
35	1000659	GDZ, JDR/M12V-35W/BA/FL30	45.0	Faceted	C-6	2950	30°	Flood	1600	2000	10

