

PHILIPS**Lighting**

Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 40W/10 SLV/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.


Product data

General Information		Voltage (Nom)	101 V
Base	G13 [Medium Bi-Pin Fluorescent]		
Main Application	Insect traps		
Life to 50% Failures (Nom)	9000 h		
Useful Life (Nom)	5000 h		
System Description	Rapid Start (RS)		
Light Technical		UV	
Color Code	10	UV-B/UV-A (IEC)	0.2 %
Color Designation	Actinic	UV-A Radiation 100Hr (IEC)	10.0 W
Chromaticity Coordinate X (Nom)	222	UV-A Radiation 0Hr (IEC)	12.4 W
Chromaticity Coordinate Y (Nom)	210		
UV Depreciation at 2000 h	20 %		
UV Depreciation at 5000 h	40 %		
Operating and Electrical		Product Data	
Power (Rated) (Nom)	39 W	Order product name	Actinic BL TL 40W/10 SLV/25
Lamp Current (Nom)	0.43 A	EAN/UPC - Product	8711500260260
		Order code	391532
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material Nr. (12NC)	928011301020
		Net Weight (Piece)	292.000 g

Actinic BL TL(-K)/TL-D(-K)


Dimensional drawing

Product	D (max)	A (max)	B	C (max)
Actinic BL TL 40W/10 SLV/25	37.25 mm	1198.4 mm	1205.4 mm	1212.4 mm

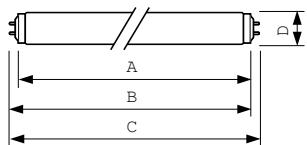

TL 40W/10 RS

Photometric data

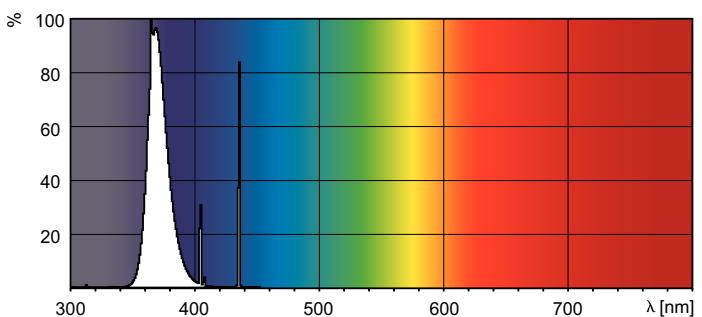

XDPO_XUVATLRS_10-Spectral power distribution Colour

