



T5 Preheat

F6T5/CW PH 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.


Product data

General Information		Voltage (Nom)	42 V																														
Base	G5 [G5]																																
Life To 10% Failures (Nom)	5000 h																																
Life to 50% Failures (Nom)	10000 h																																
Life to 50% Failures Preheat (Nom)	10000 h																																
System Description	na [-]																																
Light Technical		Approval and Application																															
Color Code	33-640	Energy Efficiency Label (EEL)	B																														
Initial lumen (Nom)	260 lm	Mercury (Hg) Content (Nom)	4.4 mg																														
Color Designation	Cool White (CW)	Energy Consumption kWh/1000 h	7 kWh																														
Lumen Maintenance 10000 h (Nom)	58 %																																
Lumen Maintenance 2000 h (Nom)	75 %	Product Data																															
Lumen Maintenance 5000 h (Nom)	70 %	Correlated Color Temperature (Nom)	4100 K	Order product name	F6T5/CW FAM/25	Luminous Efficacy (rated) (Nom)	43 lm/W	EAN/UPC - Product	046677114633	Color Rendering Index (Nom)	60	Order code	332411	Operating and Electrical		Numerator - Quantity Per Pack	1	Power (Rated) (Nom)	6.0 W	Numerator - Packs per outer box	25	Lamp Current (Nom)	0.160 A	Material Nr. (12NC)	928000503321			Net Weight (Piece)	21.000 g			ILCOS Code	FD-6/41/2B-E-G5
Correlated Color Temperature (Nom)	4100 K	Order product name	F6T5/CW FAM/25																														
Luminous Efficacy (rated) (Nom)	43 lm/W	EAN/UPC - Product	046677114633																														
Color Rendering Index (Nom)	60	Order code	332411																														
Operating and Electrical		Numerator - Quantity Per Pack	1																														
Power (Rated) (Nom)	6.0 W	Numerator - Packs per outer box	25																														
Lamp Current (Nom)	0.160 A	Material Nr. (12NC)	928000503321																														
		Net Weight (Piece)	21.000 g																														
		ILCOS Code	FD-6/41/2B-E-G5																														

T5 Preheat


Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F6T5/CW FAM/25	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm




TL Mini 6W/33-640

Photometric data

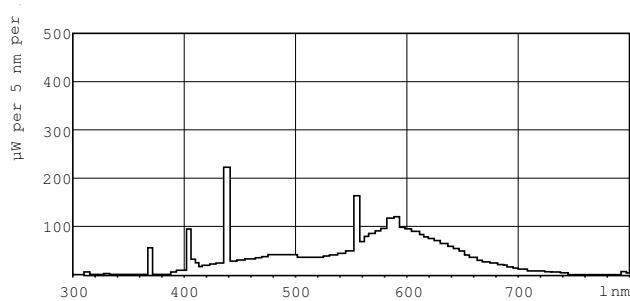

LDPB_TL-MINI_33-640-Spectral power distribution B/W

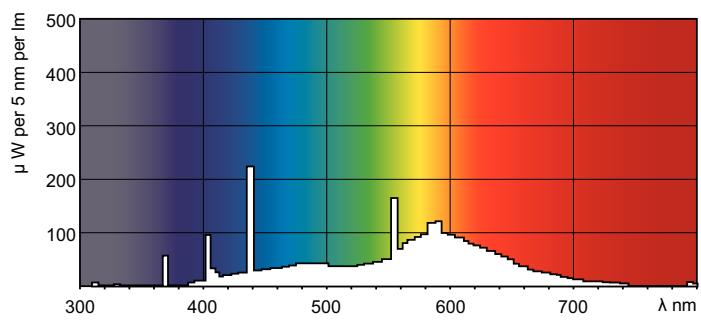

LDPO_TL-MINI_33-640-Spectral power distribution Colour

