



# T8

## 12T8/MAS/48-830/MF17/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General Information	
Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Light Technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	240 °
Initial lumen (Nom)	1700 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	141.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	12 W

Lamp Current (Max)	120 mA
Lamp Current (Min)	40 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Type B - bypass the ballast
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	No

# T8

## Mechanical and Housing

Product Length 1200 mm

## Approval and Application

Energy Efficiency Label (EEL) Not applicable  
 Energy Saving Product Yes  
 Approbation Marks RoHS compliance UL certificate DLC compliance  
 Energy Consumption kWh/1000 h - kWh

## Product Data

Order product name 12T8/MAS/48-830/MF17/G 10/1

EAN/UPC - Product 046677532673  
 Order code 532671  
 Numerator - Quantity Per Pack 1  
 Numerator - Packs per outer box 10  
 Material Nr. (12NC) 929001876834  
 Net Weight (Piece) 0.220 kg  
 Model Number 9290018768A



## Dimensional drawing

A3

Product	D1	D2	A1	A2	A3
12T8/MAS/48-830/MF17/G 10/1	25.7 mm	28 mm	1198 mm	1205 mm	1212 mm

## Performance TypeB 1800lm 12W


## Photometric data



## LEDtube PRO 12W G13 830 24D ND


## LEDtube PRO 12W G13 830 24D ND

Photometric data

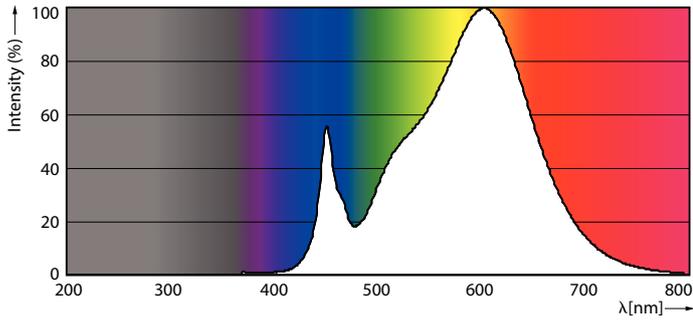


LEDtube PRO 12W G13 830 24D ND


Lifetime

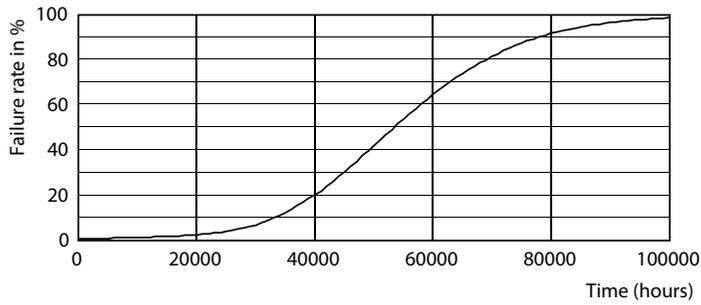


LEDtube PRO 12W G13 830 24D ND

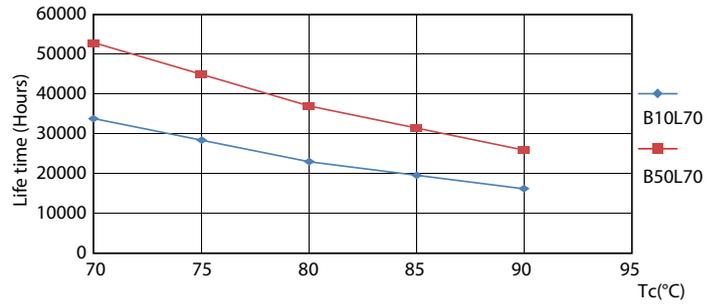

LEDtube PRO 12W G13 830 24D ND

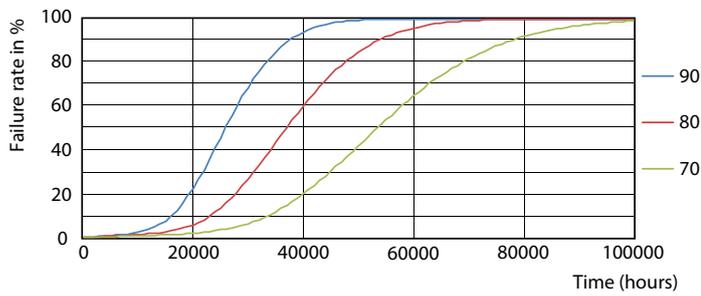


LEDtube PRO 12W G13 830 24D ND

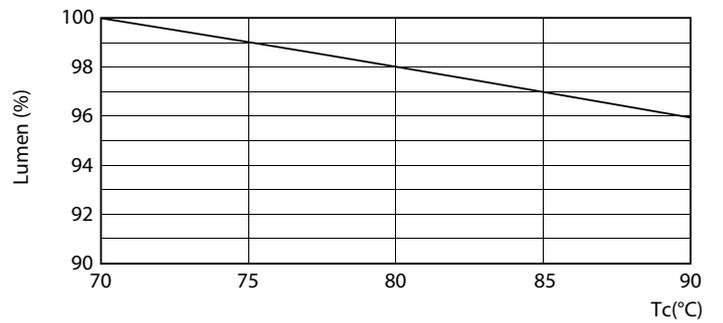

LEDtube PRO 12W G13 830 24D ND

# T8

## Lifetime

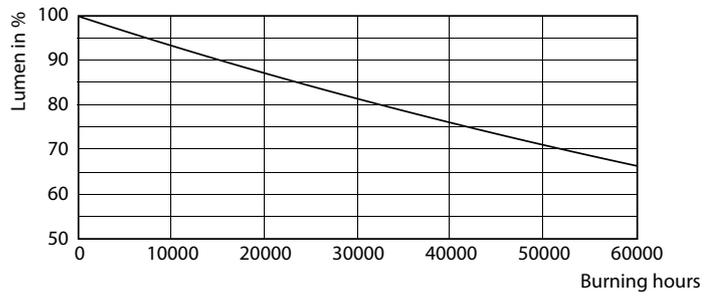

LEDtube PRO 12W G13 830 24D ND

