

**PHILIPS****Lighting**

# **Actinic BL TL(-K)/TL-D(-K)**

## **F15T8/BL 25PK**

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### **Warnings and Safety**

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### **Product data**

<b>General Information</b>	
Base	G13 [ Medium Bi-Pin Fluorescent]
Main Application	Insect traps
Life to 50% Failures (Nom)	8000 h
Useful Life (Nom)	5000 h
<b>Light Technical</b>	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210
UV Depreciation at 2000 h	10 %
<b>Operating and Electrical</b>	
Power (Rated) (Nom)	15 W
Lamp Current (Nom)	0.34 A
Voltage (Nom)	55 V
<b>Approval and Application</b>	
Mercury (Hg) Content (Nom)	5.0 mg

# Actinic BL TL(-K)/TL-D(-K)

## UV


UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	3.5 W

## Product Data

Order product name	Actinic BL TL-D 15W/10 1SL/25
EAN/UPC - Product	8711500710932

## Dimensional drawing


Order code	130369
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024801029
Net Weight (Piece)	56.570 g




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D 15W/10

## Photometric data

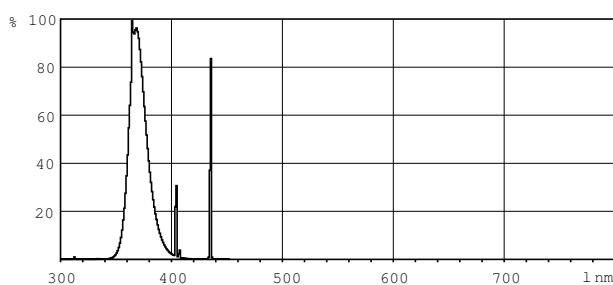

XDPB\_XUBTLD\_10-Spectral power distribution B/W

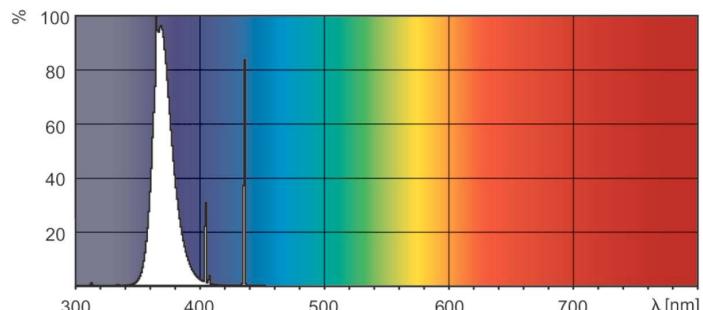

XDPO\_XUBTLD\_10-Spectral power distribution Colour

