



LED Wet Location S14 Non-Dimmable

Perfect for applications with hard to reach areas, vibration, and frequent starts.

Reasons to choose the LED Wet Location S14 from TCP

Long Life: 25,000 hours—no more bulb replacements

Excellent white color consistency from bulb to bulb

UL approved for wet locations

Wet location to replace cold cathodes

Wet Location S14 lamps are non-dimmable

Light output equivalent to 40W

Cold cathode replacement

Ideal Applications

- Chandeliers
- Ceiling Fans
- Decorative
- Indoor Fixtures
- Outdoor Fixtures
- Scoreboards
- Movie Signs

Specifications:

Voltage 120 VAC
Input Line Frequency..... 50/60HZ
Lamp Life (Rated) 25,000 hours
Minimum Starting Temp -30°C

Maximum Operating Temp.....40°C
CRI ≥ 80
UL/cUL Listed Yes
Power Factor ≥ .(


Specifications:



S14 Clear



S14 Frosted

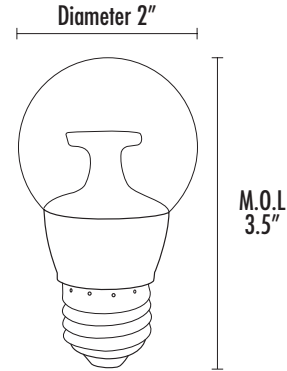

LED5E26S1427K

ITEM #	DESCRIPTION	VOLTAGE	WATTAGE	WATTAGE EQUIVALENT	MOL (inches)	DIA (inches)	LUMENS	LPW	CCT	CRI	ENCLOSED FIXTURE
LED5E26S1427K	LED 5W WET LOCATION S14 - 2700K	120	4	40W	3.5	2	300	60	2700K	80	Y
LED5E26S1430K	LED 5W WET LOCATION S14 - 3000K	120	4	40W	3.5	2	300	60	3000K	80	Y
LED5E26S1441K	LED 5W WET LOCATION S14 - 4100K	120	4	40W	3.5	2	300	60	4100K	80	Y
LED5E26S1427KF	LED 5W WET LOCATION S14 - 2700K Frosted	120	4	40W	3.5	2	300	60	2700K	80	Y
LED5E26S1430KF	LED 5W WET LOCATION S14 - 3000K Frosted	120	4	40W	3.5	2	300	60	3000K	80	Y
LED5E26S1441KF	LED 5W WET LOCATION S14 - 4100K Frosted	120	4	40W	3.5	2	300	60	4100K	80	Y