



# A-Shape LED

## 5A19/LED/930/FR/Glass/E26/DIM 1FB T20

Philips A-shape LED lamps are the LED alternative to standard incandescents. It provides beautiful light and dependable performance you expect from LED at an affordable price.

### Product data


General information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Light technical	
Color Code	930 [ CCT of 3000K]
Beam Angle (Nom)	320 °
Initial lumen (Nom)	450 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	5 W
Lamp Current (Nom)	55 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	A19 (A19)
Approval and application	
Energy Certifications	Energy Star
Product data	
Order product name	5A19/LED/930/FR/Glass/E26/DIM 1FB T20
EAN/UPC - Product	046677578541
Order code	578542
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

# A-Shape LED

Material Nr. (12NC)	929003497404
Net Weight (Piece)	0.073 lb



## Dimensional drawing



5A19/LED/930/FR/Glass/E26/DIM 1FB T20

Product	D	C
5A19/LED/930/FR/Glass/E26/DIM 1FB T20	2-3/8 in	4-3/16 in


## Photometric data

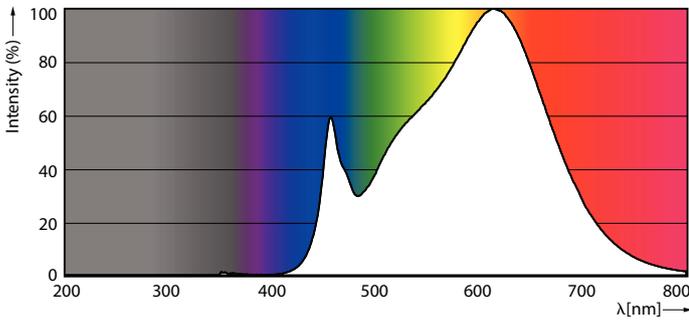

General uniform lighting

Spectral Power Distribution Colour



General uniform lighting



Light Distribution Diagram

# A-Shape LED

## Lifetime

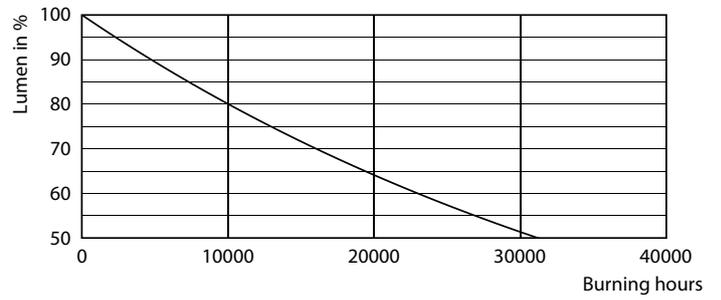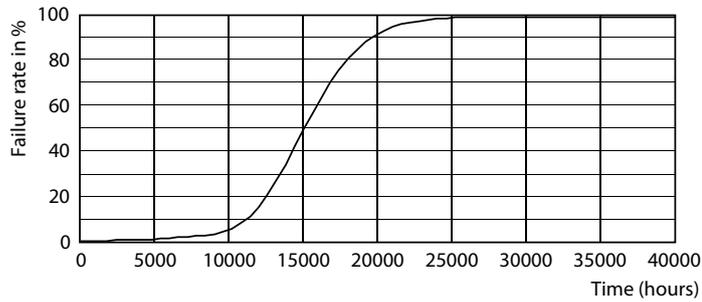

Life Expectancy Diagram

Lumen Maintenance Diagram

