

SYLVANIA LAMPS

A19 Double Life

Application

SYLVANIA A19 Double Life are a 25,000 hour long life family of lamps available in 40W, 60W, 75W and 100W. These lamps are designed to last 22 years, are offered in a frosted glass filament design and deliver high quality lighting in any application.

Benefits and Features

- CEC and JA8 qualified
- Suitable for wet locations
- Environmentally preferred products: RoHS compliant and contain no mercury, lead or other hazardous materials
- Dimmable to customize light output
- Approved for use in enclosed fixtures
- 90+ CRI for high quality color rendering

Electrical

- 120 VAC
- Dimmable

Rated Life

- 25,000 hours (L₇₀)

Warranty

- 3-year
- NLB Trusted Warranty Program

Operating Temperature

- -4°F to +113°F (-20°C to +45°C)



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
A19	40W	5W	88%
A19	60W	8W	87%
A19	75W	11W	85%
A19	100W	13W	87%

Certifications and Listings

- cETLus
- RoHS
- FCC
- Mercury Free
- Title 24 and Title 20



Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide


LED	XX	A19	DIM	0	9	XX	22Y	W	RP4
Product Name	Wattage	Lamp Type	Dimmable	Direction	CRI	Color Temperature	Lamp life	Rating	Packaging
LED = LED Technology	5 = 5 Watts 8 = 8 Watts 11 = 11 Watts 13 = 13 Watts	A19	DIM = Dimmable	0 = Omni-directional	9 = 90+	27 = 2700K 30 = 3000K 35 = 3500K 50 = 5000K	22Y = 22 Year Life	W = Wet Rated	RP4 = 4 SKU

Ordering Information

Item Number	Ordering Abbreviation	Wattage Equivalent (W)	Power (W)	Base Type	Input Voltage (V)	Average Rated Life (hrs)	Color Temperature (CCT)	Total Fixture Lumens (lm)	CRI	LPW	Dimming	Case Qty
42356	LED5A19DIM092722YWRP4	40W	5	E26	120V	25,000	2700K	450	90	90	Yes	16
42368	LED5A19DIM093022YWRP4	40W	5	E26	120V	25,000	3000K	450	90	90	Yes	16
42357	LED5A19DIM093522YWRP4	40W	5	E26	120V	25,000	3500K	450	90	90	Yes	16
42358	LED5A19DIM095022YWRP4	40W	5	E26	120V	25,000	5000K	450	90	90	Yes	16
42359	LED8A19DIM092722YWRP4	60W	8	E26	120V	25,000	2700K	800	90	100	Yes	16
42369	LED8A19DIM093022YWRP4	60W	8	E26	120V	25,000	3000K	800	90	100	Yes	16
42360	LED8A19DIM093522YWRP4	60W	8	E26	120V	25,000	3500K	800	90	100	Yes	16
42361	LED8A19DIM095022YWRP4	60W	8	E26	120V	25,000	5000K	800	90	100	Yes	16
42365	LED11A19DIM092722YWRP4	75W	11	E26	120V	25,000	2700K	1,100	90	100	Yes	16
42370	LED11A19DIM093022YWRP4	75W	11	E26	120V	25,000	3000K	1,100	90	100	Yes	16
42366	LED11A19DIM093522YWRP4	75W	11	E26	120V	25,000	3500K	1,100	90	100	Yes	16
42367	LED11A19DIM095022YWRP4	75W	11	E26	120V	25,000	5000K	1,100	90	100	Yes	16
42362	LED13A19DIM092722YWRP4	100W	13	E26	120V	25,000	2700K	1,600	90	123	Yes	16
42371	LED13A19DIM093022YWRP4	100W	13	E26	120V	25,000	3000K	1,600	90	123	Yes	16
42363	LED13A19DIM093522YWRP4	100W	13	E26	120V	25,000	3500K	1,600	90	123	Yes	16
42364	LED13A19DIM095022YWRP4	100W	13	E26	120V	25,000	5000K	1,600	90	123	Yes	16

Physical Information

Lamp description	(A) Diameter in (mm)	(B) Height in (mm)
A19	2.362 (60)	4.055 (103)

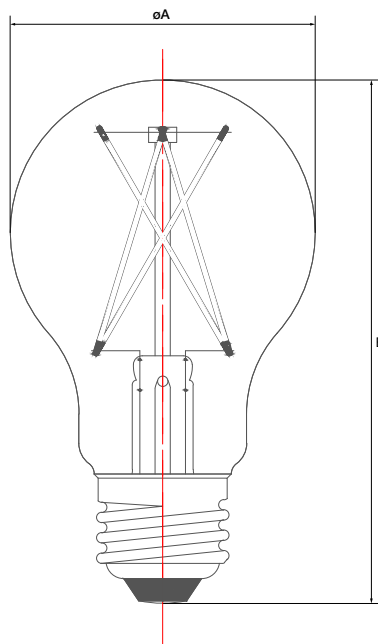

LEDVANCE LLC
 181 Ballardvale Street, Suite 203
 Wilmington, MA 01887 USA
 Phone 1-800-544-4828
LEDVANCE.COM/EN-US

LEDVANCE is a registered trademark.
 All other trademarks are those of their respective owners.
 Specifications subject to change without notice.

© 2026 LEDVANCE LLC