

PRODUCT FOCUS

PIN BASE

Compact Fluorescent Lamp

FOR >> TABLE, DESK & FLOOR LAMPS
>> RECESSED LIGHTING
>> WALL SCONCE
>> CEILING MOUNTED LIGHTING
>> TASK LIGHTING



MLS9/27
MLS9/41

MLS13/27
MLS13/30
MLS13/35
MLS13/41

MLD13/41

MLD18/41
MLD26/41



MLDE13/27
MLDE13/35
MLDE13/41
MLDE18/27
MLDE18/35
MLDE18/41
MLDE26/27
MLDE26/35
MLDE26/41



MLTE18/27
MLTE18/30
MLTE18/35
MLTE18/41
MLTE26/27
MLTE26/35
MLTE26/41

MLTE32/35
MLTE32/41
MLTE42/27
MLTE42/35
MLTE42/41

- Compact size
- Easy installation
- Up to 75% energy saving
- Long life - up to 10,000 hours
- Various Colors (2700K - 5000K)
- Various Wattages (5W - 40W)


MaxLite™: 1-800-555-5629 Fax: 973-244-7300 info@maxlite.com www.maxlite.com

MaxLite West™: 1-800-793-1212 Fax: 909-944-1442 info@maxlite.com www.maxlite.com


PRODUCT FOCUS

PIN BASE

Compact Fluorescent Lamp



G23



GX23



MLS9/27

10,000 Hour
(7) 6762716122 (3)*



MLS13/27

10,000 Hour
(7) 6762716132 (2)*

MLS13/30


10,000 Hour
(7) 6762716133 (9)*

MLS9/41


10,000 Hour
(7) 6762716121 (6)*

MLS13/35


10,000 Hour
(7) 6762716144 (5)*



GX23-2



G24d-2



G24d-3



MLD13/41

10,000 Hour
(7) 6762716201 (5)*



MLD18/41

10,000 Hour
(7) 6762716211 (4)*



MLD26/41

10,000 Hour
(7) 6762716221 (3)*

SINGLE TUBE SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Mol	K	CRI
9	16122	MLS9/27 2 Pin Single G23	600	10,000	Box	50	6.4	2700	82
9	16121	MLS9/41 2 Pin Single G23	600	10,000	Box	50	6.4	4100	82
13	16132	MLS13/27 2 Pin Single GX23	825	10,000	Box	50	7.0	2700	82
13	16133	MLS13/30 2 Pin Single GX23	825	10,000	Box	50	7.0	3000	82
13	16144	MLS13/35 2 Pin Single GX23	825	10,000	Box	50	7.0	3500	82

2 PIN DOUBLE (QUAD) TUBE SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Mol	K	CRI
13	16201	MLD13/41 2 Pin Double GX23-2	860	10,000	Box	50	4.7	4100	82
18	16211	MLD18/41 2 Pin Double G24d-2	1250	10,000	Box	50	6	4100	82
26	16221	MLD26/41 2 Pin Double G24d-3	1800	10,000	Box	50	6.8	4100	82


MAX10495-10

All specifications are subject to change without notice

PRODUCT FOCUS

PIN BASE

Compact Fluorescent Lamp

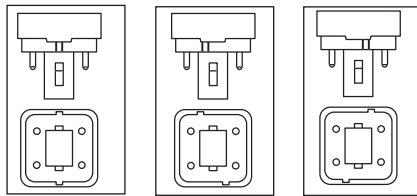

G24q-1

G24q-2

G24q-3



MLDE13/27

10,000 Hour
(7) 6762716302 (9)*

MLDE18/27

10,000 Hour
(7) 6762716312 (8)*

MLDE26/27

10,000 Hour
(7) 6762716322 (7)*

MLDE13/35

10,000 Hour
(7) 6762716303 (6)*

MLDE18/35

10,000 Hour
(7) 6762716313 (5)*

MLDE26/35

10,000 Hour
(7) 6762716323 (4)*

MLDE13/41

10,000 Hour
(7) 6762716301 (2)*

MLDE18/41

10,000 Hour
(7) 6762716311 (1)*

MLDE26/41

10,000 Hour
(7) 6762716321 (0)*

4 PIN DOUBLE (QUAD) TUBESPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Mol	K	CRI
13	16302	MLDE13/27 4 Pin Double G24q-1	900	10,000	Box	50	5.2	2700	82
13	16303	MLDE13/35 4 Pin Double G24q-1	900	10,000	Box	50	5.2	3500	82
13	16301	MLDE13/41 4 Pin Double G24q-1	900	10,000	Box	50	5.2	4100	82
18	16312	MLDE18/27 4 Pin Double G24q-2	1250	10,000	Box	50	5.8	2700	82
18	16313	MLDE18/35 4 Pin Double G24q-2	1250	10,000	Box	50	5.8	3500	82
18	16311	MLDE18/41 4 Pin Double G24q-2	1250	10,000	Box	50	5.8	4100	82
26	16322	MLDE26/27 4 Pin Double G24q-3	1800	10,000	Box	50	6.5	2700	82
26	16323	MLDE26/35 4 Pin Double G24q-3	1800	10,000	Box	50	6.5	3500	82
26	16321	MLDE26/41 4 Pin Double G24q-3	1800	10,000	Box	50	6.5	4100	82


MAX10495-10


All specifications are subject to change without notice


PRODUCT FOCUS

PIN BASE

Compact Fluorescent Lamp


GX24q-2


GX24q-3


GX24q-4


MLTE18/27
 10,000 Hour
 (7) 6762716416 (3)*


MLTE26/27
 10,000 Hour
 (7) 6762716422 (4)*


MLTE32/35
 10,000 Hour
 (7) 6762716434 (7)*


MLTE42/27
 10,000 Hour
 (7) 6762716435 (4)*

MLTE18/30
 10,000 Hour
 (7) 6762716413 (2)*

MLTE26/35
 10,000 Hour
 (7) 6762716424 (8)*

MLTE32/41
 10,000 Hour
 (7) 6762716431 (6)*

MLTE42/35
 10,000 Hour
 (7) 6762716436 (1)*

MLTE18/35
 10,000 Hour
 (7) 6762716414 (9)*

MLTE26/41
 10,000 Hour
 (7) 6762716421 (7)*

MLTE42/41
 10,000 Hour
 (7) 6762716437 (8)*

MLTE18/41
 10,000 Hour
 (7) 6762716411 (8)*

4 PIN TRIPLE TUBE SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Mol	K	CRI
18	16416	MLTE18/27 4 Pin Triple GX24q-2	1200	10,000	Box	50	4.5	2700	82
18	16413	MLTE18/30 4 Pin Triple GX24q-2	1200	10,000	Box	50	4.5	3000	82
18	16414	MLTE18/35 4 Pin Triple GX24q-2	1200	10,000	Box	50	4.5	3500	82
18	16411	MLTE18/41 4 Pin Triple GX24q-2	1200	10,000	Box	50	4.5	4100	82
26	16422	MLTE26/27 4 Pin Triple GX24q-3	1800	10,000	Box	50	5.1	2700	82
26	16424	MLTE26/35 4 Pin Triple GX24q-3	1800	10,000	Box	50	5.1	3500	82
26	16421	MLTE26/41 4 Pin Triple GX24q-3	1800	10,000	Box	50	5.1	4100	82
32	16434	MLTE32/35 4 Pin Triple GX24q-3	2400	10,000	Box	50	5.6	3500	82
32	16431	MLTE32/41 4 Pin Triple GX24q-3	2400	10,000	Box	50	5.6	4100	82
42	16435	MLTE42/27 4 Pin Triple Gx24q-4	3100	10,000	Box	50	6.4	2700	82
42	16436	MLTE42/35 4 Pin Triple Gx24q-4	3100	10,000	Box	50	6.4	3500	82
42	16437	MLTE42/41 4 Pin Triple Gx24q-4	3100	10,000	Box	50	6.4	4100	82

MAX10495-10

All specifications are subject to change without notice

PRODUCT FOCUS

PIN BASE

Compact Fluorescent Lamp

SPECIAL NOTES	APPLICATIONS	LOCATIONS
>> Do not use with dimmers or other control devices >> Suitable for fully enclosed fixtures	• Recessed cans • Ceiling Fixtures • Enclosed indoor/outdoor fixtures	• Residential • Restaurant • Retail • Hotel/Motel • Office • School/Hospital

BENEFITS	SPECIFICATIONS
• Compact size • Easy installation • Up to 75% energy saving • Long life - up to 10,000 hours • Various colors (2700K-5000K) • Various wattages (5W-40W)	• End of Life Ballast >> Yes • Ballast Type >> Electronic • Starting Method >> Instant Start • Input Line Voltage >> 120VAC • Input Line Frequency >> 50/60HZ • Mini. Starting Temp. >> 0°F • Max. Operating Temp. >> 100°F • Color Rendering Index >> 82

MAX10495-10

All specifications are subject to change without notice