



# LED A19-A21

## 6R20/PER/850/P/E26/DIM 6/1FB

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.

### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	6-45W

Light Technical	
Color Code	850 [ CCT of 5000K]
Beam Angle (Nom)	120 °
Initial lumen (Nom)	450 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	75.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	6 W
Lamp Current (Nom)	53 mA
Wattage Equivalent	45 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.6 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	75 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Finish	Frosted


Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Energy Consumption kWh/1000 h	- kWh

Product Data	
Order product name	6R20/PER/850/P/E26/DIM 6/1FB
EAN/UPC - Product	046677535247
Order code	535245
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001887804

# LED A19-A21

Net Weight (Piece) 0.050 kg


## Dimensional drawing




R20 120V 6-50W 450lm 90D 5000K E26 D

Product	D	C
6R20/PER/850/P/E26/DIM 6/1FB	63 mm	94 mm


## Photometric data

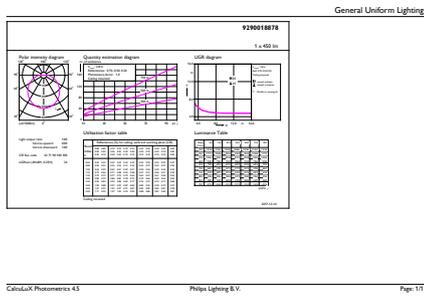

45W E26 R20 FR 120D 850 5000K

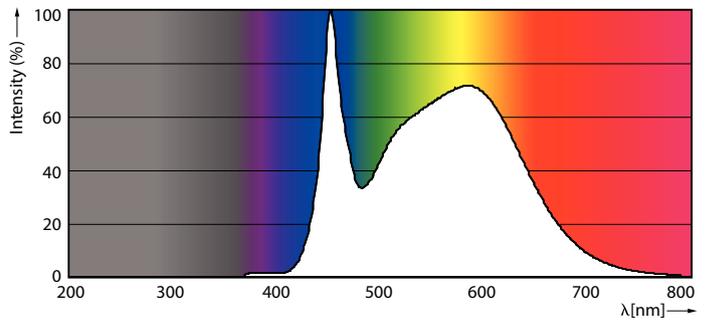



45W E26 R20 FR



45W E26 R20 FR 120D 850 5000K

# LED A19-A21

## Lifetime

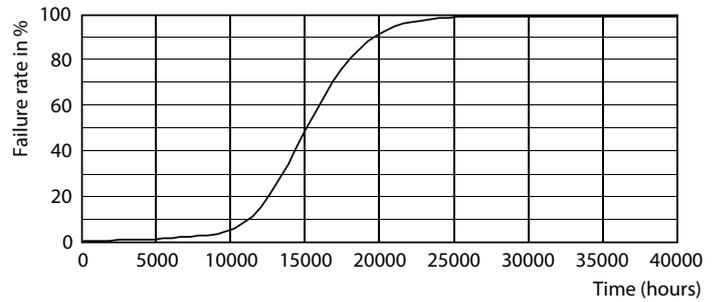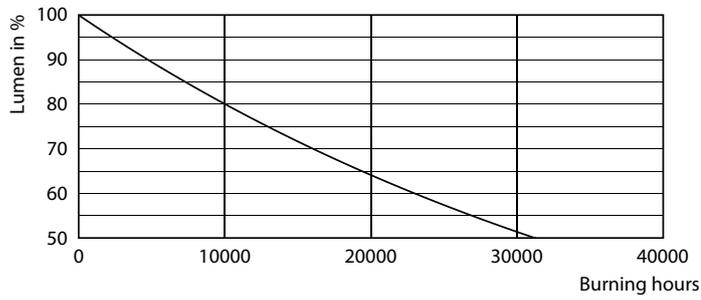

45W E26 R20 FR

45W E26 R20 FR

