



LED B11

4.5B11/VIN/820/E12/CL/GL/DIM FBH T20

Philips LED B11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.


Product data

General Information	
Base	E12 [Candelabra Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	4,5-40W
Light Technical	
Color Code	820 [CCT of 2000K]
Initial lumen (Nom)	300 lm
Color Designation	Flame
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	66.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	4,5 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Amber
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	4.5B11/VIN/820/E12/CL/GL/DIM FBH T20
EAN/UPC - Product	046677556853
Order code	556852
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929001951433
Net Weight (Piece)	0.018 kg

LED B11


Dimensional drawing




Candle B11 4.5-40W 300lm 2000K D Amber

Product	D	C
4.5B11/VIN/820/E12/CL/GL/DIM FBH T20	35 mm	97 mm


Photometric data



LEDbulb B11 4,5W E12 820 Amber

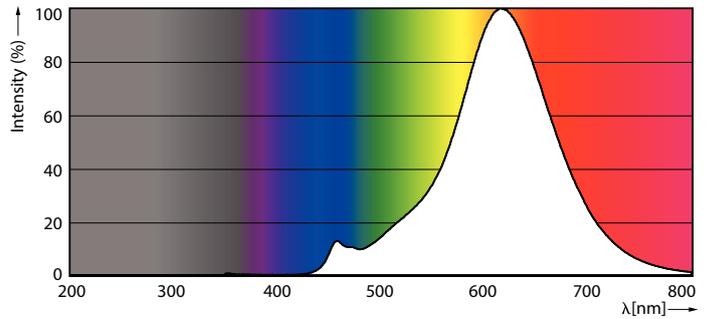



LEDbulb 4,5W B11 E12 820 Amber

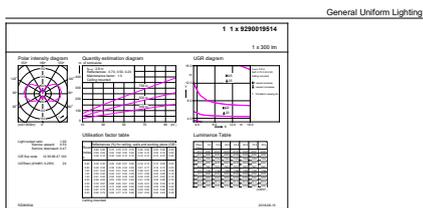

LEDbulb 4,5W B11 E12 820 Amber

LED B11

Lifetime

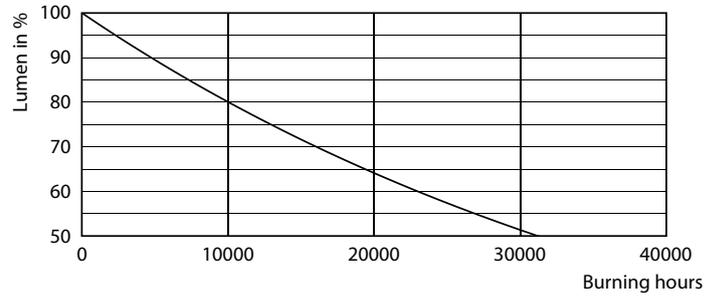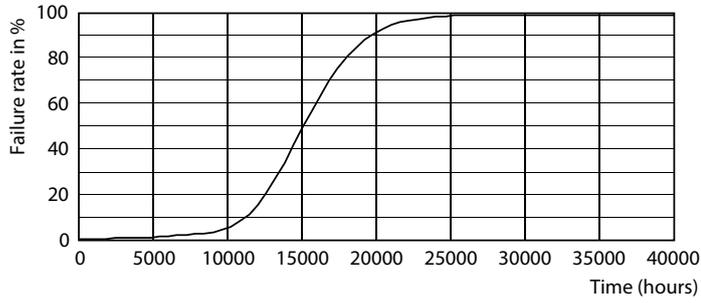

15K LED

15K LMP

